


AVERY DENNISON MARKETING SPECIFICATION

© 2020 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
B	05/31/24	REMOVED NON-EXISTANT FEATURE

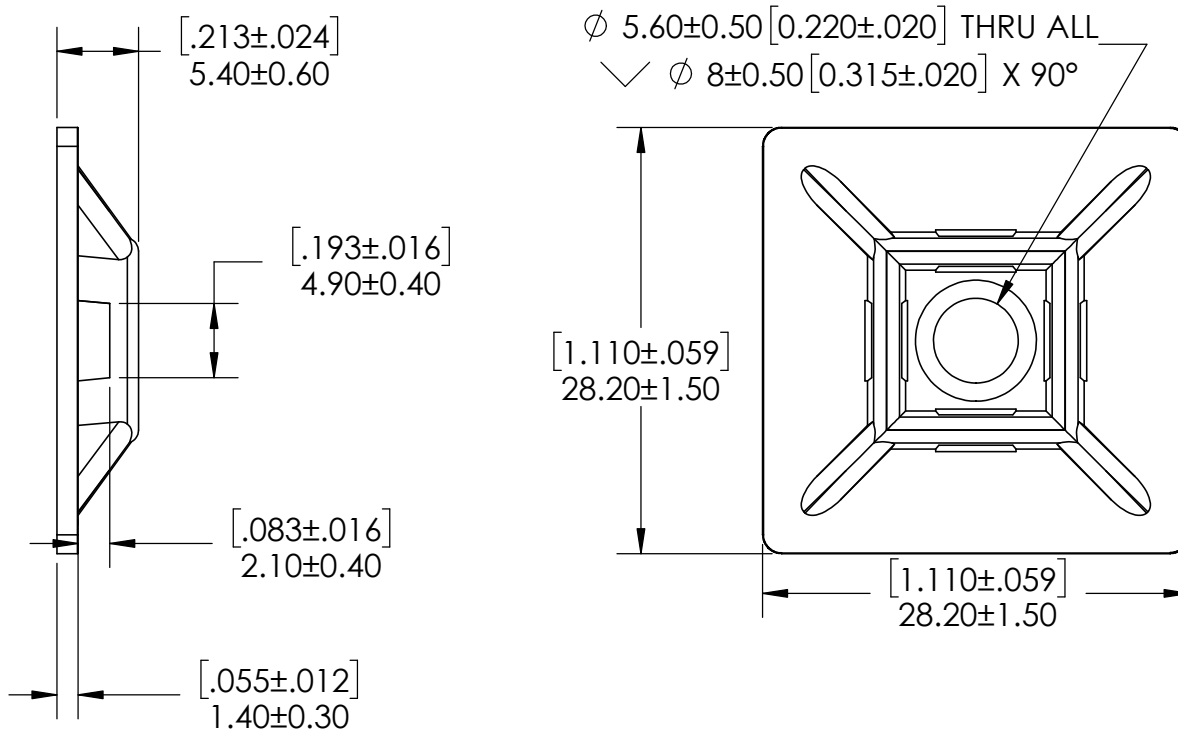

NOTES:

1. MATERIAL: POLYAMIDE 6.6 NATURAL
2. THESE MOUNTS HAVE A FLAMMABILITY RATING OF V-2
3. HUMIDITY ABSORPTION: 2.7% - 2.8% (23° C - 50% R.H.)
4. INSTALLATION TEMPERATURE: -10° C MINIMUM - +50° C MAXIMUM (14° - 122°F)
5. OPERATING TEMPERATURE: -30° C - +85° C (-22° - 185°F)
6. LOOP TENSILE STRENGTH: 50 LBF (220N) MIN

WEIGHT, PP:	N/A	BAG QUANTITY:	100	APPLICATION TOOL
WEIGHT, NYLON:	1.476 g (EST)	BOX QUANTITY:	1,000	SCREW MOUNTING
		CASE QUANTITY:	5,000	
APPROVALS:	ENG. APPR.	J Richardson 10.10.22		
	Q.A. APPR.	William O' Malley 07.17.23		
SPECIFIED TOLERANCES ARE:		MATERIAL	DESCRIPTION	
X. ± 1.0 mm [.04 IN] .XX ± .25 mm [.010 IN]		SEE NOTES	1" CABLE TIE MOUNT, SCREW MOUNT	
.X ± .5 mm [0.02 IN] .XXX ± .100 mm [.004 IN]		COLOR	STOCK NO.	REV.
ANGULAR: ± 2°		SEE NOTES	08463-2	B



AVERY DENNISON

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157