AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
L	09.26.13	CHG PRIMARY UNITS TO mm; CHG THE TOLERANCE ON ITEM 2,6

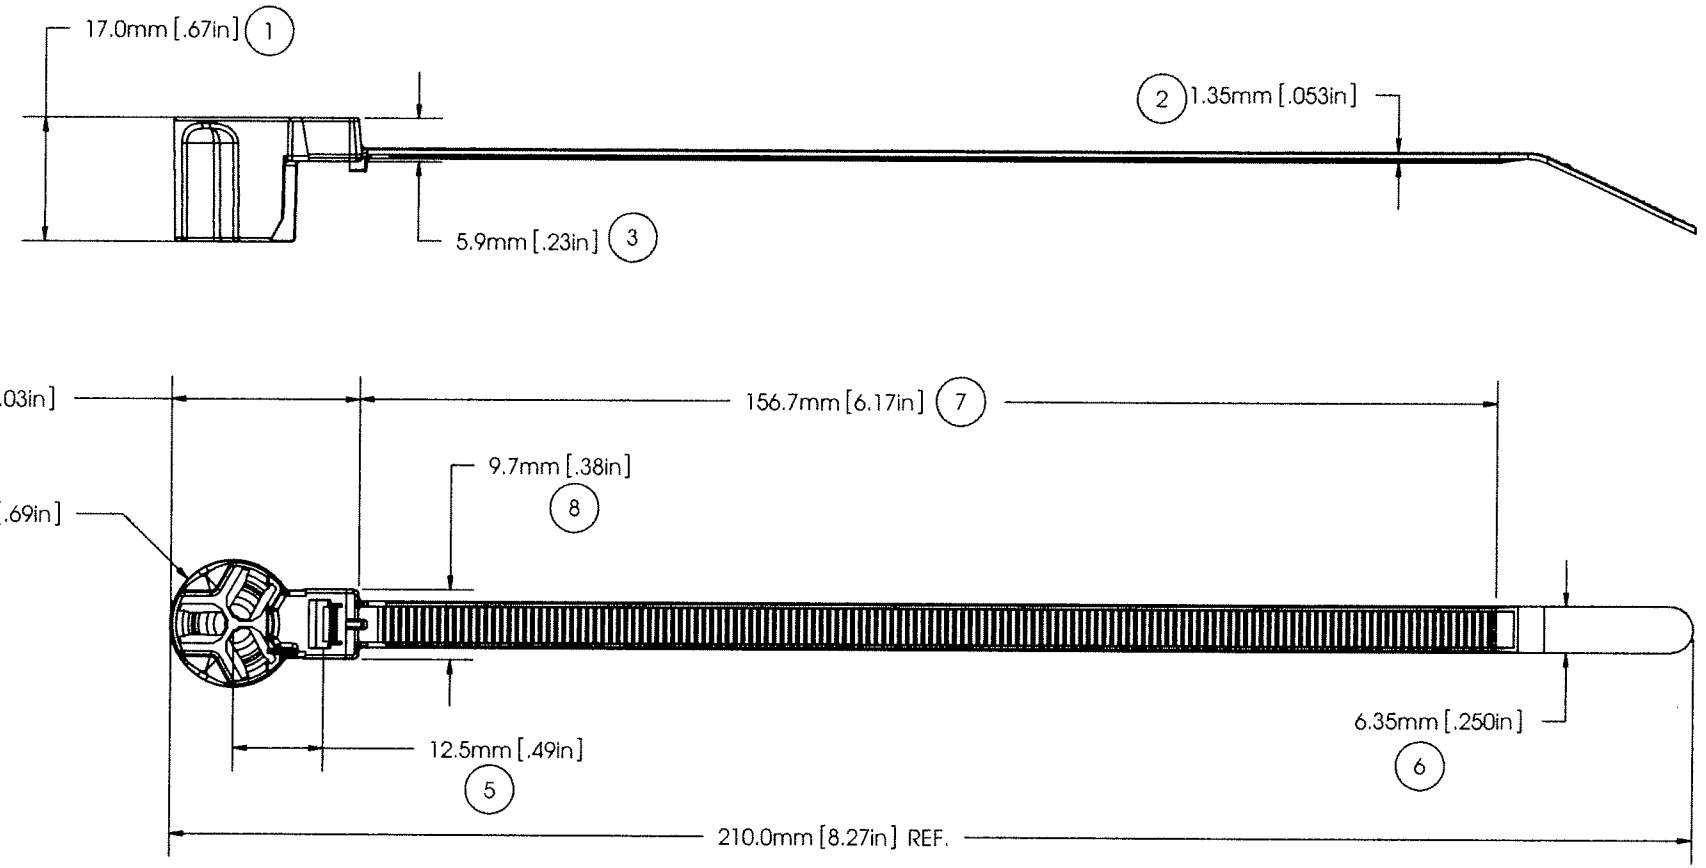

MOUNTING:	T5,M5 AND M6 STUDS
TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 257°F (125°C)
WEIGHT:	0.1125 OZ./3.31 GRAMS
BUNDLE DIAMETER:	Ø1.6MM TO Ø44.5MM
TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNUEM. INSTALLATION TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS: ENG. APPR. 9/26/13

Q.A. APPR. 10/8/13

SPECIFIED TOLERANCES ARE:

.XX ± .03 IN. .X ± .7 MM

.XXX ± .01 IN. .XX ± .25 MM

ANGULAR: ± 2°

MATERIAL
NYLON 6/6, IMPACT MODIFIED HEAT STABILIZED

COLOR
BLACK

AVERY DENNISON

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION
T5, M5 & M6 WELD STUD TIE

STOCK NO. **10708-0** REV. **L**

5 4 3 2 1