# AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

| REV. | DATE | DESCRIPTION |
|---|---|---|
| G | 7.24.12 | REMOVED THE WINDOWS IN THE FIR TREE |
| H | 04.10.13 | ITEM 8 FROM 6.20IN TO 6.14/6.22 AND ITEM 6 FROM .35IN TO .37 |

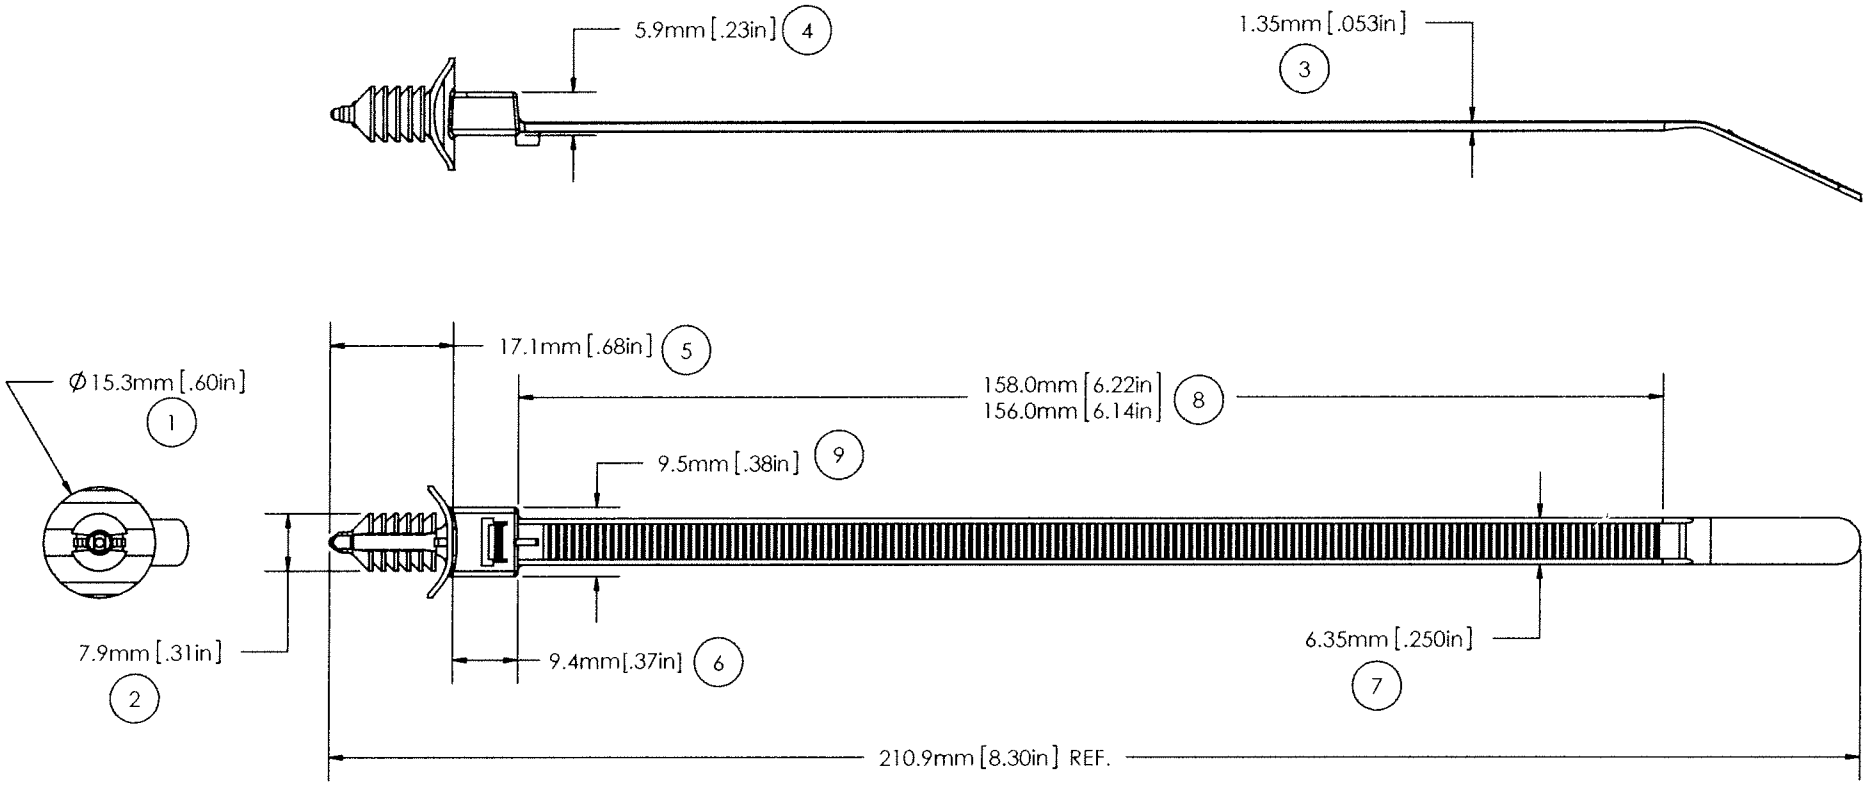


| | |
|---|---|
| MOUNTING: | 6.4MM TO 7.0MM HOLES |
| TENSILE STRENGTH: | 50 LBF / 22.7 KGF MIN. |
| OPERATING TEMP RANGE: | -40°F (-40°C) TO 257°F (125°C) |
| WEIGHT: | 0.0700 OZ./ 2.06 GRAMS |
| BUNDLE DIAMETER: | Ø1.6MM/ .063IN TO Ø44.5MM/1.75IN |
| TOOL: | 12001 - HAND INSTALLATION TOOL<br>12500 - PNUEM. INSTALLATION TOOL |
| TOOL TENSION SETTING: | 6 - 8 |
| PACKAGING: | 500/BAG, 10 BAGS/MASTER |

APPROVALS: ENG. APPR. 4/15/13 Q.A. APPR. 4/15/13

SPECIFIED TOLERANCES ARE:
.XX ± .03 IN. .X ± .7 MM
.XXX ± .01 IN. .XX ± .25 MM
ANGULAR: ± 2°

MATERIAL: IMPACT MODIFIED NYLON 6/6 HEAT STABILIZED

COLOR: BLACK

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION: FIR TREE TIE - STANDARD

STOCK NO. 10709-0

REV. H

5 4 3 2 1