


AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY		
REV.	DATE	DESCRIPTION
F	7/16/14	UPDATE DRWG TO NEW FORMAT. ADD NOTE TO TOOTH DIMENSION CORRECTED THE OPER. TEMP TO MATCH 20042
G	10/16/14	BALLOON DIM 6 MODIFIED TO ACCOMMODATE TWO MOLDS; VIEWS REORIENTED TO MATCH 20042

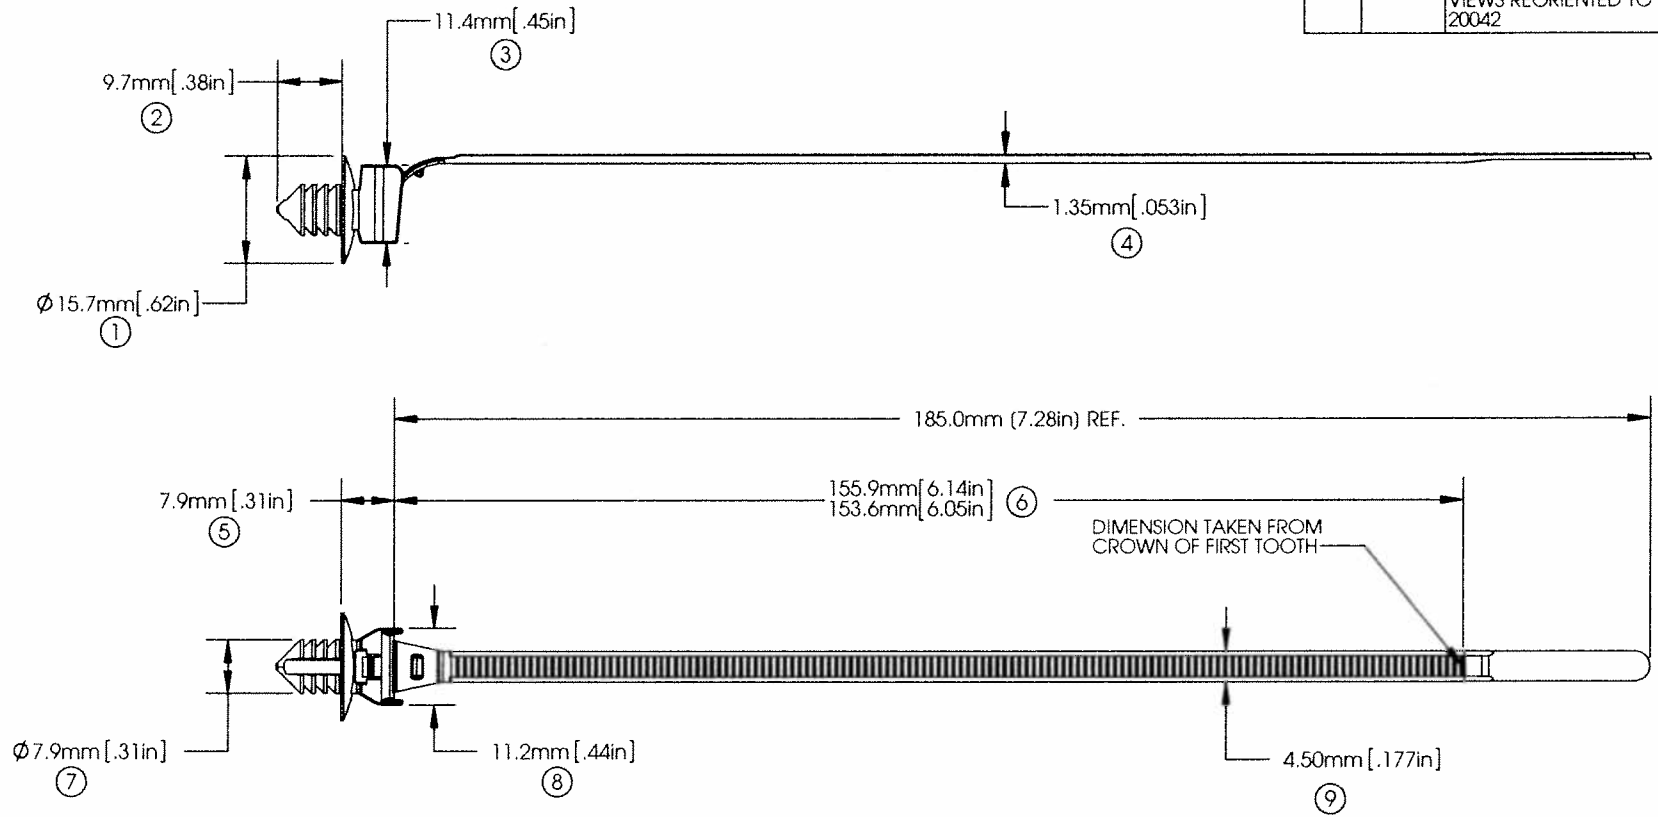

MOUNTING:	$\phi 6.60 \pm 0.25\text{MM}$ HOLE AND 6.35MM HEX HOLE IN 3.0MM MAXIMUM THICK PANEL
TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 257°F (125°C)
WEIGHT:	1.8g
BUNDLE DIAMETER:	$\phi 1\frac{1}{16}$ " (1.6mm) TO $\phi 1\frac{3}{4}$ " (44.5mm)
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS: ENG. APPR. *[Signature]* 10/16/14
Q.A. APPR. *[Signature]* 10/16/14

SPECIFIED TOLERANCES	
INCHES	(MM)
.XX ± .03	.X ± .7
.XXX ± .010	.XX ± .25
ANGULAR: ± 2°	

MATERIAL	IMPACT MODIFIED NYLON 6/6
COLOR	GREY



DESCRIPTION	4 FLUTE CURVED TIE	
STOCK NO.	20002-0	REV. G