


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

REV.	DATE	DESCRIPTION
F	10-16-08	UPDATE MODEL AND UPDATE OPERATING TEMPERATURE.
G	08.06.18	UPDATES TO NEW FORMAT; ADDED -0 TO PART NUMBER; ADDED SPECIAL CHARACTERISTIC NOTE; DIM 152.2 WAS MADE A REF.; ALL NUMBERS READJUSTED TO AVERY DRAWING STD.

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

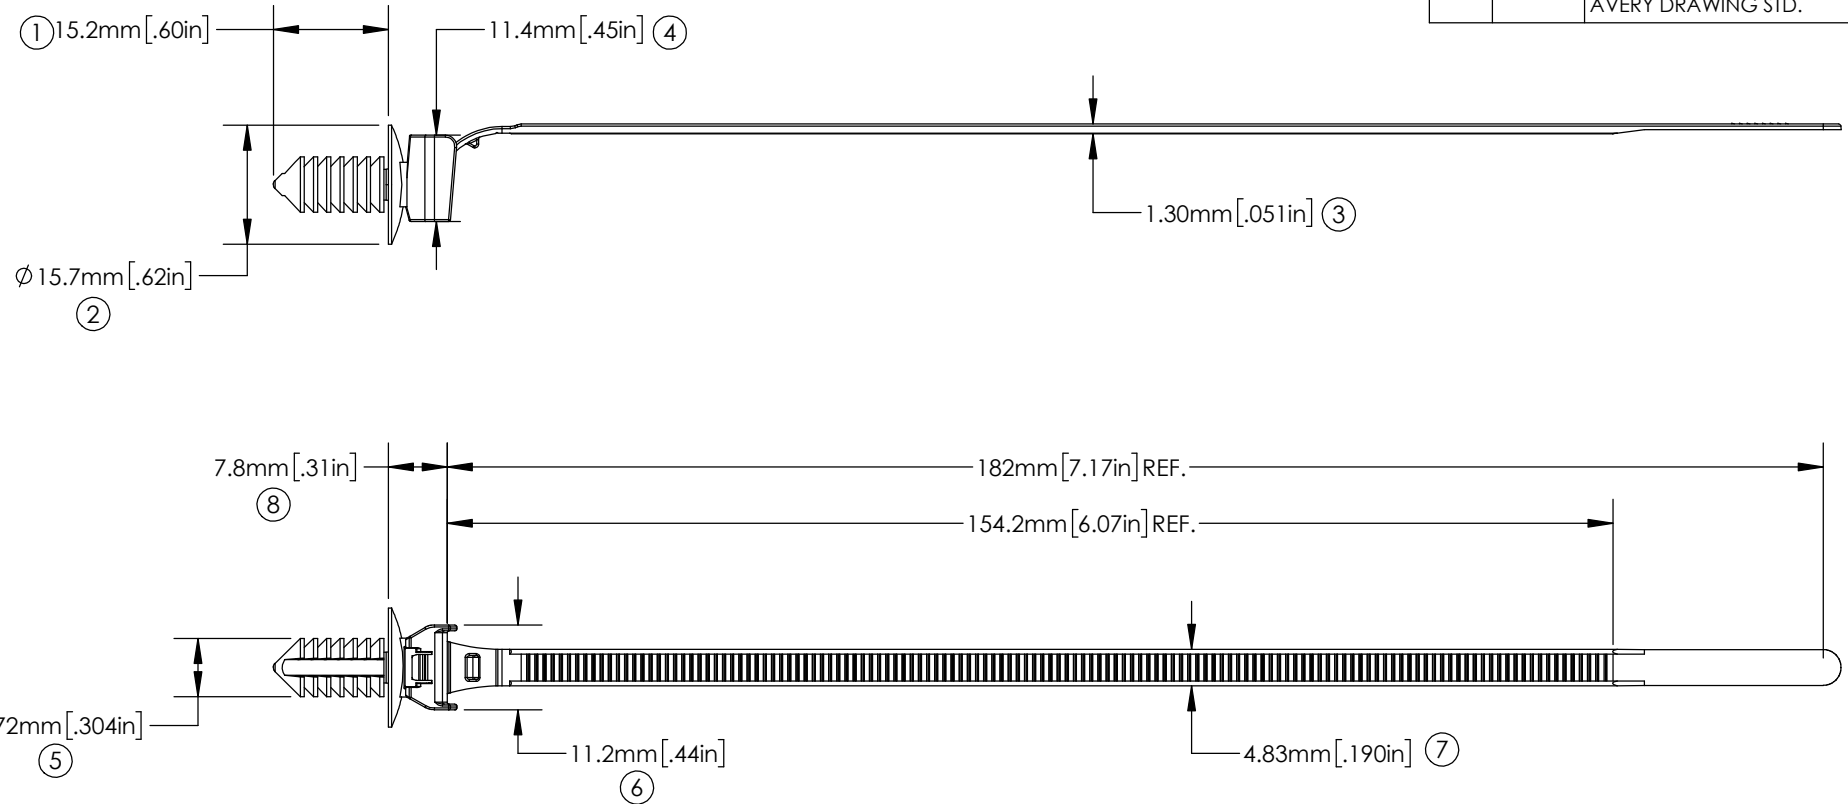

⑨ Δ	FLAMMABILITY:	HB RATED PER FMVSS302
⑩ Δ	TENSILE STRENGTH:	222N / 50 LBF MIN.
	MOUNTING:	Ø 6.60 ± 0.25mm HOLE AND 6.35mm HEX HOLE IN 7.0mm MAXIMUM THICK PANEL
	OPERATING TEMP RANGE:	-40 °F (-40 °C) TO 257 °F (125 °C)
	WEIGHT:	1.8g
	BUNDLE DIAMETER:	Ø 1.6mm [.06in] TO Ø 44.5mm [1.75in]
	INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	500/BAG, 10 BAGS/MASTER

NOTES:

1. Δ = INDICATES SPECIAL CHARACTERISTIC

APPROVALS:	ENG. APPR. <i>Daniel Gilbertson</i>	08.06.18
	Q.A. APPR. <i>Rick Estano</i>	08.06.18



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES	MATERIAL	DESCRIPTION
INCHES [mm]	NYLON 6/6, IMPACT MODIFIED, HEAT STAB.	7 FLUTE CURVED TIE
.XX ± .03 .X ± .7	COLOR	PART NO.
.XXX ± .010 .XX ± .25	BLACK	20038-0
ANGULAR: ± 2°		REV. G