
AVERY DENNISON MARKETING SPECIFICATION

© 2026 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY		
REV.	DATE	DESCRIPTION
D	02.22.19	UPDATED TO NEW FORMAT; ADDED SPECIAL CHARACT.; ADDED -0 TO PN; TEETH LENGTH DIM MADE REF.
E	10.15.26	UPDATED THE TENSILE STRENGTH TO 30LBS UPDATED FLAMMABILITY STATEMENT

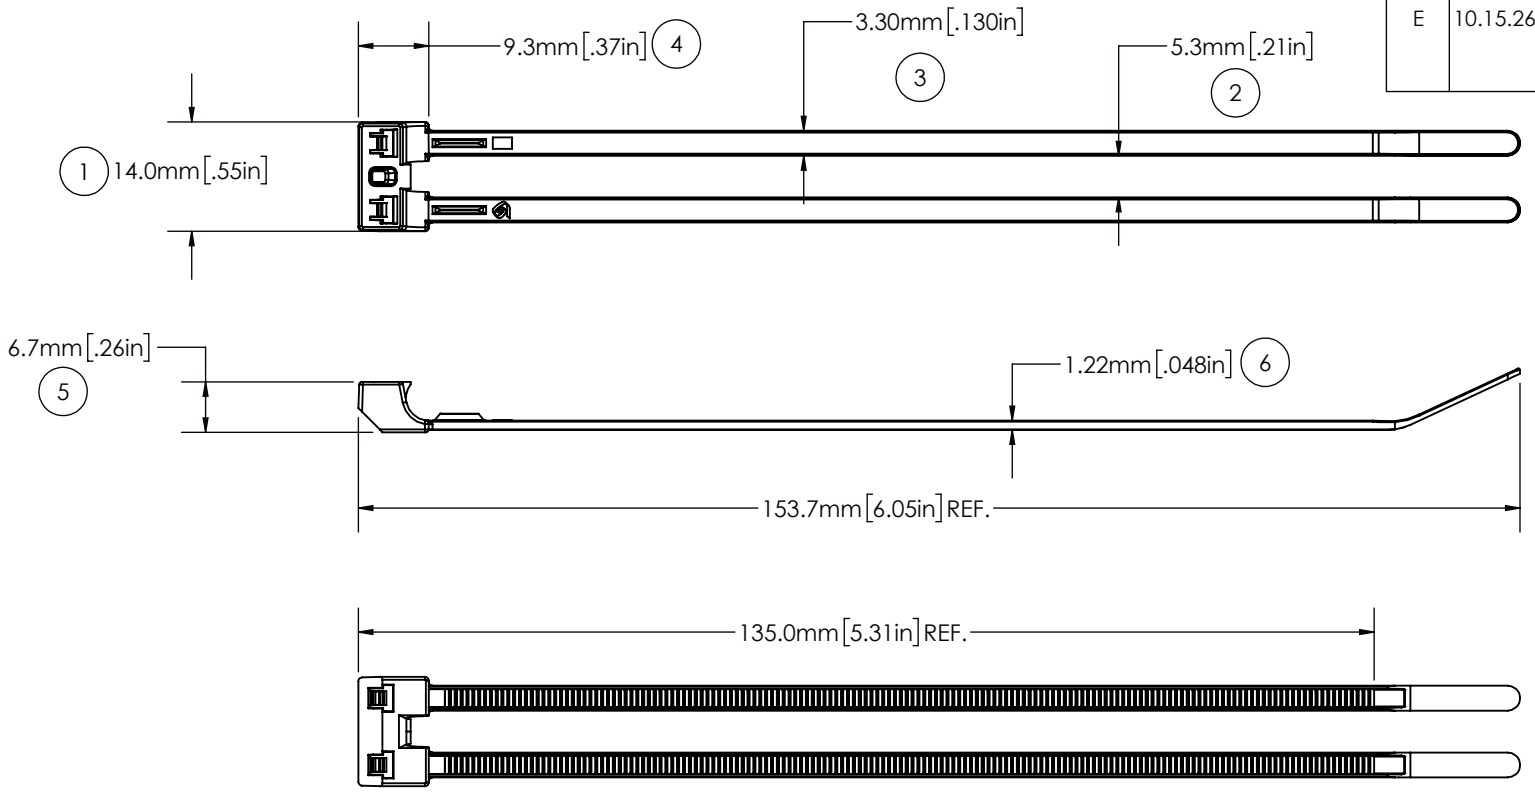

NOTES:
1. △ = INDICATES SPECIAL CHARACTERISTIC

⑦	△ FLAMMABILITY:	TESTED & APPROVED PER FMVSS302
⑧	△ TENSILE STRENGTH:	30 LBF /13.6 KGF MIN.
	WEIGHT:	1.5g
	BUNDLE DIAMETER:	Ø6.0mm[.25in]TO Ø41.3mm[1.63in]
	TOOL:	12001 - HAND INSTALLATION TOOL 12500 - PNUEM. INSTALLATION TOOL
	TOOL TENSION SETTING:	3 - 5
	PACKAGING:	1000/BAG, 5000/CASE

APPROVALS:

ENG. APPR.	Parth Patel	10.15.26
Q.A. APPR.	Abraham Rocha	10.15.26

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES ARE:
.XX ± .03 IN. .X ± .7 mm
.XXX ± .01 IN. .XX ± .25 mm
ANGULAR: ± 2°

MATERIAL: **NYLON 6/6, IMHS**

COLOR: **BLACK**

DESCRIPTION: **6" DOUBLE STRAP TIE**

STOCK NO.: **20040-0**

REV.: **E**

5 4 3 2 1