


AVERY DENNISON MARKETING SPECIFICATION

© 2019 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV.	DATE	DESCRIPTION
A	1-5-18	RELEASE TO PRODUCTION
B	8-29-19	CORRECTED OPERATING TEMP

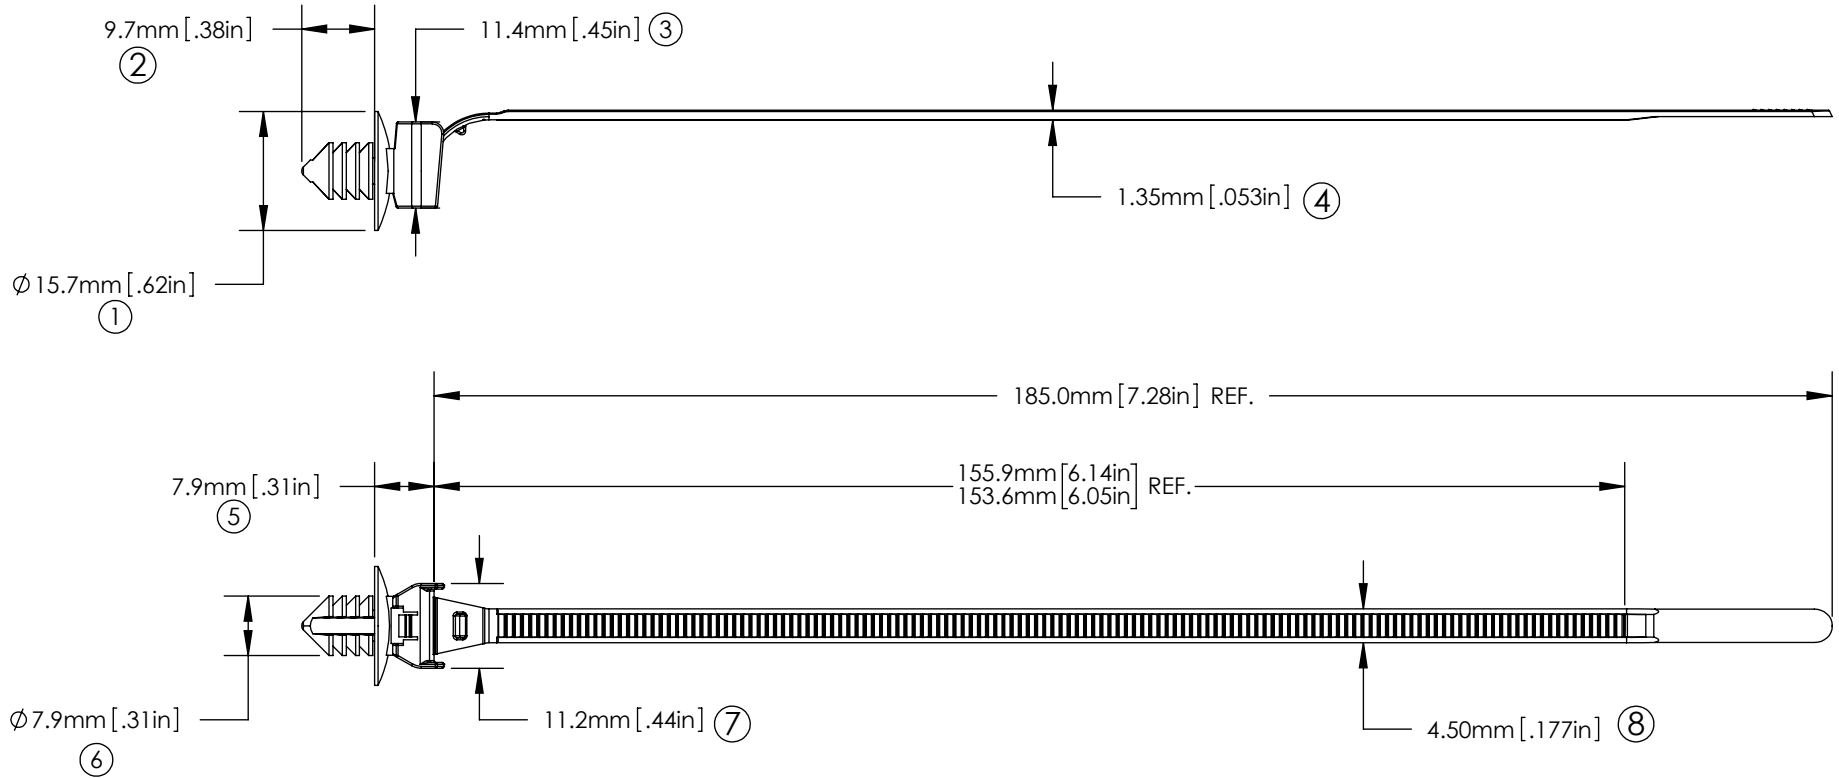

9 \triangle FLAMMABILITY:	HB RATED PER FMVSS302
10 \triangle TENSILE STRENGTH:	50 LBF / 222 N MIN.
MOUNTING:	$\text{Ø} 6.60 \pm 0.25\text{MM}$ HOLE AND 6.35MM HEX HOLE IN 3.0MM MAXIMUM THICK PANEL
OPER. TEMP RANGE:	-40°F (-40°C) TO 302°F (150°C) CONTINUOUS AND 329°F (165°C) AT MAXIMUM EXPOSURE
WEIGHT:	1.8g
BUNDLE DIAMETER:	$\text{Ø} 1/16"$ [1.6mm] TO $\text{Ø} 1-3/4"$ [44.5mm]
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS:	ENG. APPR. <i>Michael O'Regan</i> 9/3/2019
	Q.A. APPR. <i>Caitlin Vaillancourt</i> 9/3/2019

SPECIFIED TOLERANCES	
INCHES	[MM]
.XX \pm .03	.X \pm .7
.XXX \pm .010	.XX \pm .25
ANGULAR: $\pm 2^\circ$	

MATERIAL	NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED
COLOR	BROWN



AVERY DENNISON

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION	4 FLUTE CURVED TIE, HIGH HEAT	
STOCK NO.	20042-HHBN	REV. B