


# AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

## HISTORY

REV.	DATE	DESCRIPTION
E	10-16-08	UPDATE MODEL AND UPDATE OPERATING TEMPERATURE
F	10-16-14	ADDED NOTE TO TOOTH DIM. DIM 6 MODIFIED TO ACCOMMODATE TWO MOLDS

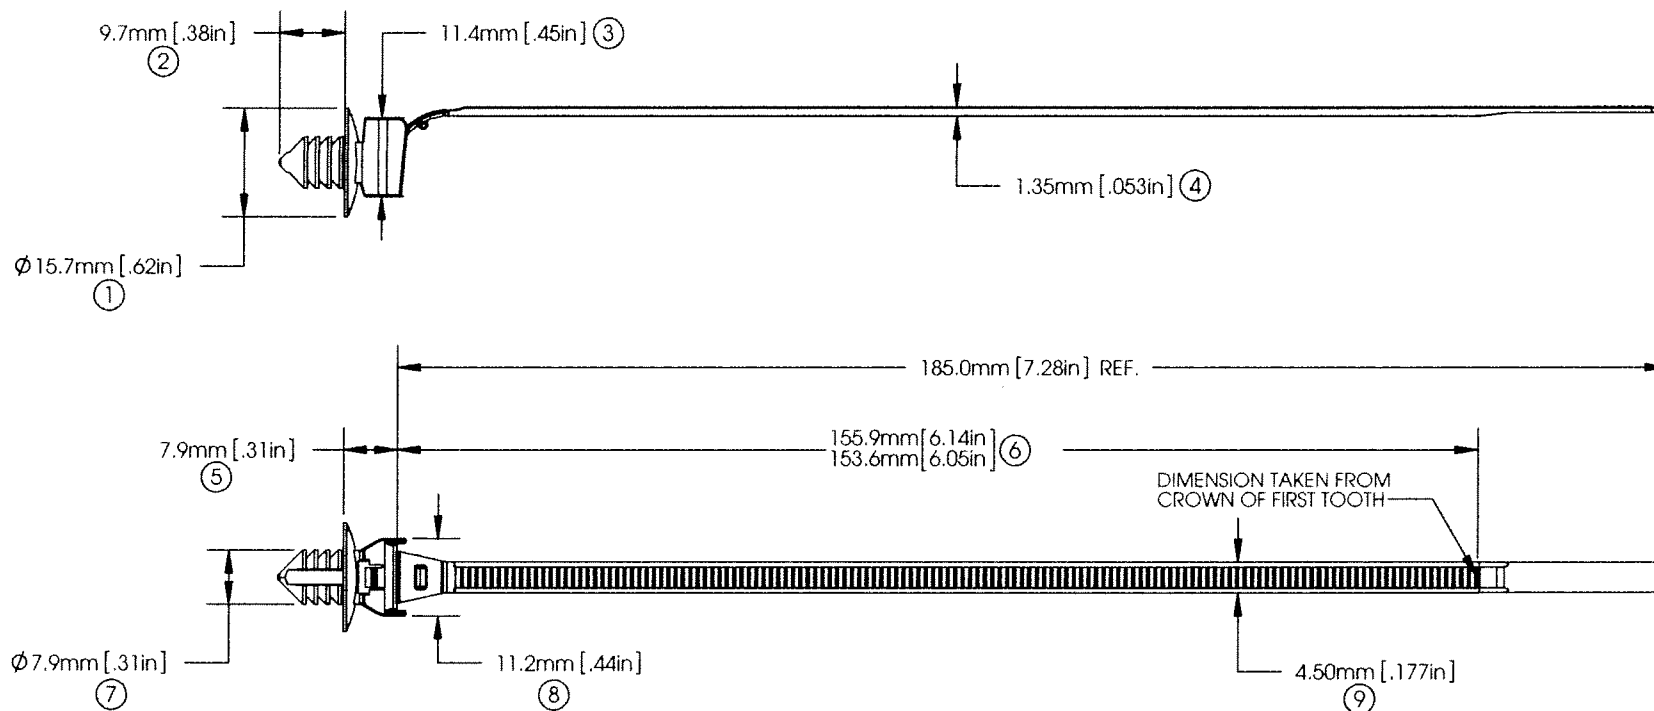

MOUNTING:	Ø6.60 ± 0.25MM HOLE AND 6.35MM HEX HOLE IN 3.0MM MAXIMUM THICK PANEL
TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 257°F (125°C)
WEIGHT:	1.8g
BUNDLE DIAMETER:	Ø 1/16" (1.6mm) TO Ø 1-3/4" (44.5mm)
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS:	ENG. APPR. <i>[Signature]</i> 10/16/14
	Q.A. APPR. <i>[Signature]</i> 10/16/14
SPECIFIED TOLERANCES	
INCHES (MM)	
.XX ± .03	.X ± .7
.XXX ± .010	.XX ± .25
ANGULAR: ± 2°	
MATERIAL	
IMPACT MODIFIED NYLON 6/6	
COLOR	
BLACK	



**AVERY DENNISON**

FASTENER DIVISION  
FITCHBURG, MA 01420 U.S.A.  
TEL. 1-800-225-5913  
FAX. 978-353-8157

DESCRIPTION		
4 FLUTE CURVED TIE		
STOCK NO.	20042-0	REV. F