


AVERY DENNISON PRODUCT SPECIFICATION

TOLERANCES IN. = $\pm .030$ IN.

MM = ± 0.7 mm

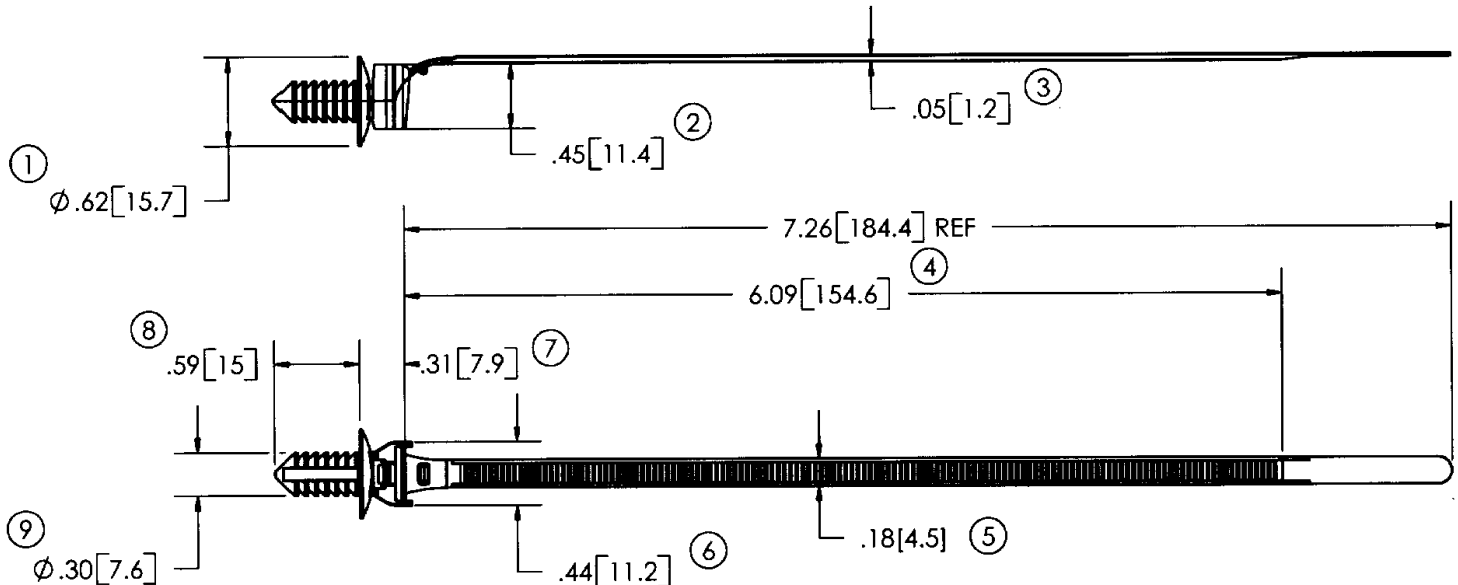

NOT TO SCALE

TENSILE STRENGTH: (LOOPED)	50 LBSF. / 22.7 KGF. MINIMUM PER MIL-S-23190.
OPERATING TEMP. RANGE:	-40°F (-40°C) TO 220°F (105°C)
MATERIAL:	IMPACT MODIFIED NYLON 6/6 PER ASTM D4066 - HEAT STABILIZED, GREY
WEIGHT:	1.7 - 1.9 GRAMS/EACH
BUNDLE DIAMETER:	1/16" - 1-3/4"
APPLICATION TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP, AVERY DENNISON PART NUMBER 08480.
TOOL TENSION SETTING:	6-8
MOUNTING:	6.6MM HOLE
PACKAGED IN:	500/BAG, 10 BAGS/MASTER

STOCK NO.	DESCRIPTION
20091	GREY HEAT STABILIZED

NOTE: FLASH AND SHORTS ARE ACCEPTABLE
PROVIDED THAT ALL FUNCTIONAL SPECIFICATIONS
ARE MET.



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

7 FLUTE CURVED TIE, GREY

APPROVALS:	T.S.: <i>[Signature]</i> 6/2/04
	ENG'RG: <i>[Signature]</i> 5/28/04
STOCK NO.	20091
REV.	A