


AVERY DENNISON MARKETING SPECIFICATION




THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY

REV.	DATE	DESCRIPTION
A	3/1/20	RELEASE TO PRODUCTION

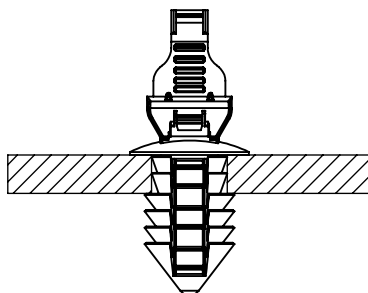

ASSEMBLED VIEW

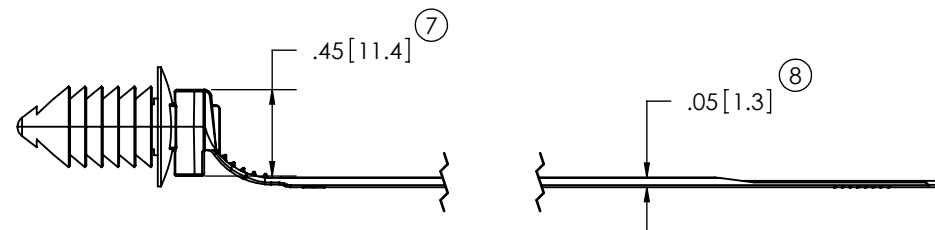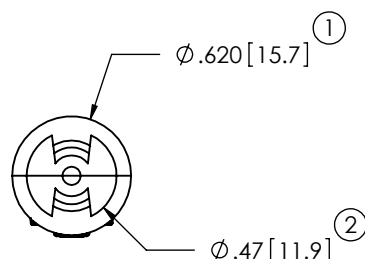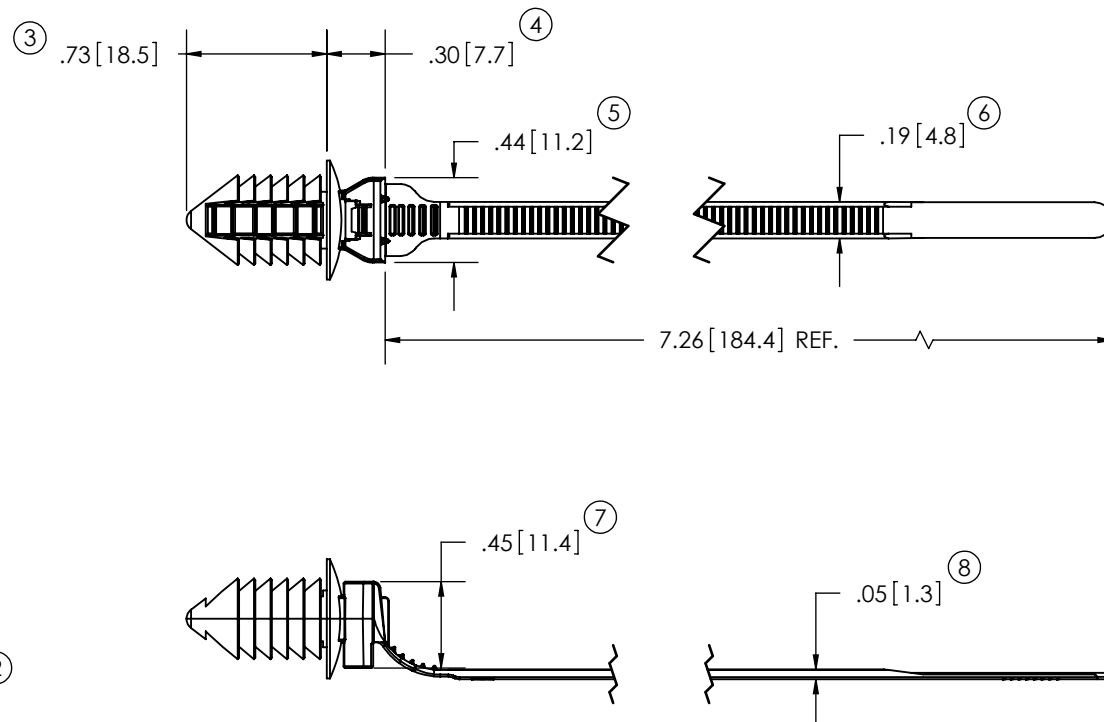

MOUNTING:	Ø 10MM ± 0.25 HOLE IN 0.7MM TO 5MM THICK PANEL.
TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
OPERATING TEMP. RANGE:	-40°F (-40°C) TO 302°F (150°C)
WEIGHT:	2.1 GRAMS
BUNDLE DIAMETER:	Ø 1.6MM TO Ø 44.5MM
TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP. AVERY DENNISON PART NO. 12001-0
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS:	ENG. APPR.
	Q.A. APPR.

SPECIFIED TOLERANCES ARE:		MATERIAL
.XX ± .02 INCHES	.X ± .5 MM	NYLON 6/6 IMHS HIGH HEAT
.XXX ± .01 INCHES	.XX ± .25 MM	COLOR
ANGULAR: ± 2°		BROWN

	FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157	
	DESCRIPTION	

10MM FIR TREE CURVED TIE, HIGH HEAT	
STOCK NO.	REV.
20103-HHBN	A