


AVERY DENNISON MARKETING SPECIFICATION


HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

REV	ECO	DATE	DESCRIPTION
B		06-24-09	INCREASE CAPACITY, UPDATE TEMPERATURE RANGE
C		04.17.13	ADDED ITEM 11
D	F-4206	06.26.26	TOP VIEW PAWL ORIENTATION CORRECTED; ADDED CUT VIEW

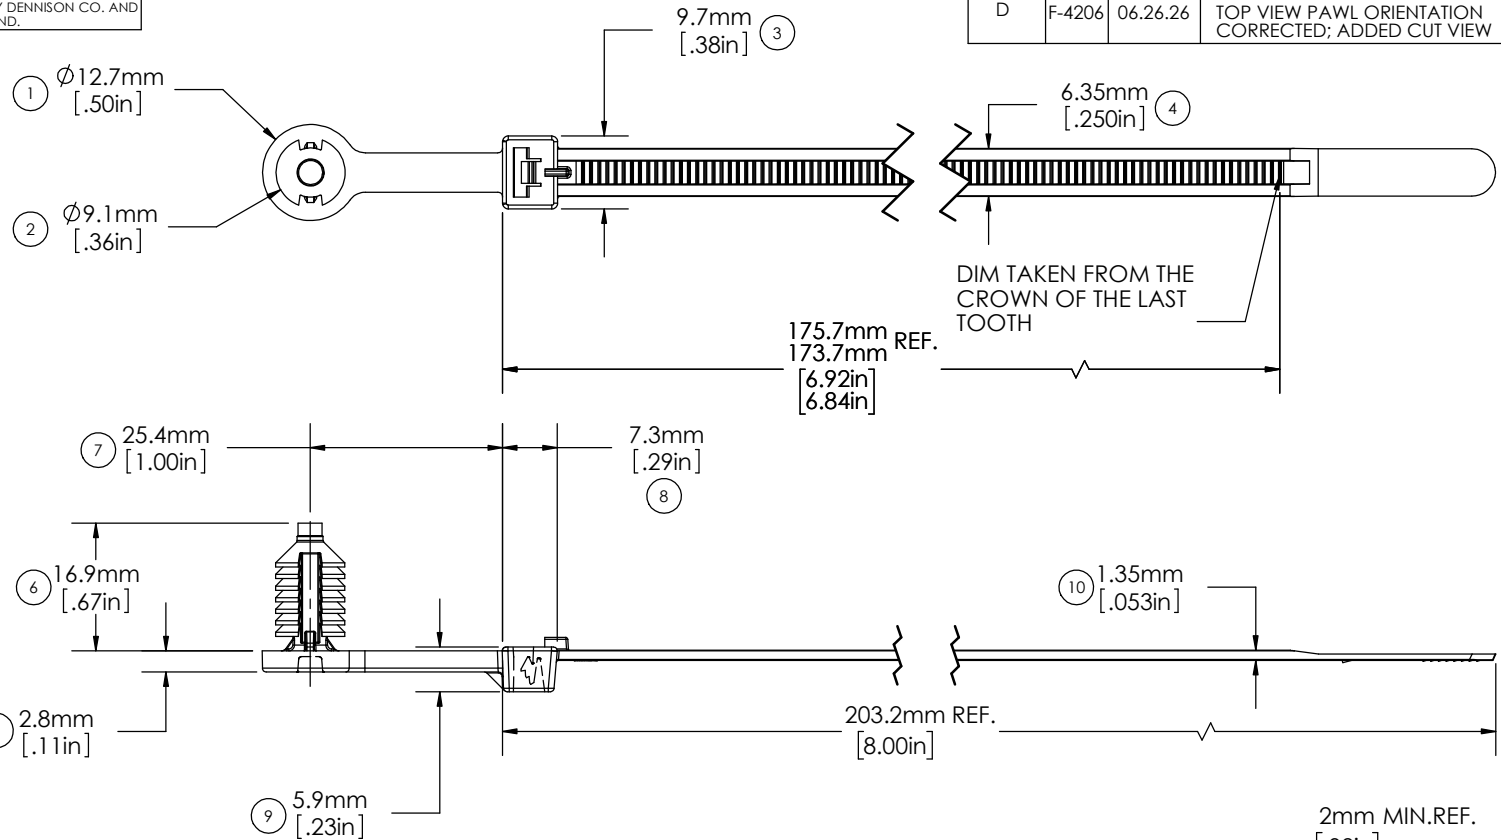

ASSEMBLED VIEW

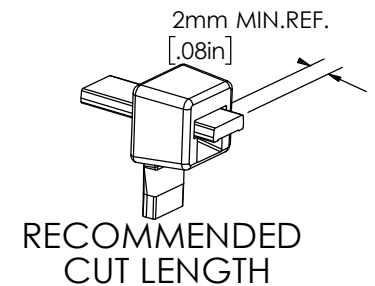

RECOMMENDED CUT LENGTH

11	Δ TENSILE STRENGTH:	50 LBF / 222.4N MIN.
12	Δ FLAMMABILITY RATING:	HB RATED PER FMVSS302
	MOUNTING:	Ø8.00 ± 0.25MM HOLE IN 7MM MAXIMUM THICK PANEL, M10 THREADED HOLE
	TEMPERATURE RANGE:	-40 °F (-40 °C) TO 239 °F (115 °C) CONTINUOUS AND 257 °F (125 °C) AT MAXIMUM EXPOSURE
	WEIGHT:	2.9 GRAMS
	BUNDLE DIAMETER:	Ø6.35MM TO Ø44.5MM
	INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS:

ENG. APPR. <i>Daniel Gilbertson</i>	06/26/26
Q.A. APPR. <i>Abraham Lopez</i>	06/26/26

GENERAL TOLERANCE	
INCHES	MM
.XX ± .03	.X ± .7
.XXX ± .010	.XX ± .25
ANGULAR: ± 3°	

MATERIAL	NYLON 6/6 IMPACT MODIFIED, HEAT STABILIZED
COLOR	BLACK



AVERY DENNISON

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION	
8mm OFF-SET TIE, STANDARD	
STOCK NO.	REV.
20121-0	D