


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

REV.	DATE	DESCRIPTION
C	11-04-14	ADDED NOTE TO DIM 10 AND 12: BALLOON #'S 4 AND 9 CHG TO TWO DECIMAL PLACES
D	10-27-16	ADDED SPECIAL CHAR. NOTE AND (Δ) TO THE SC'S; ADJUSTED WEIGHT TO ONE DECIMAL PLACE AND ADJUSTED DIM 12 TO BE AT MIDDLE OF TOL. RANGE

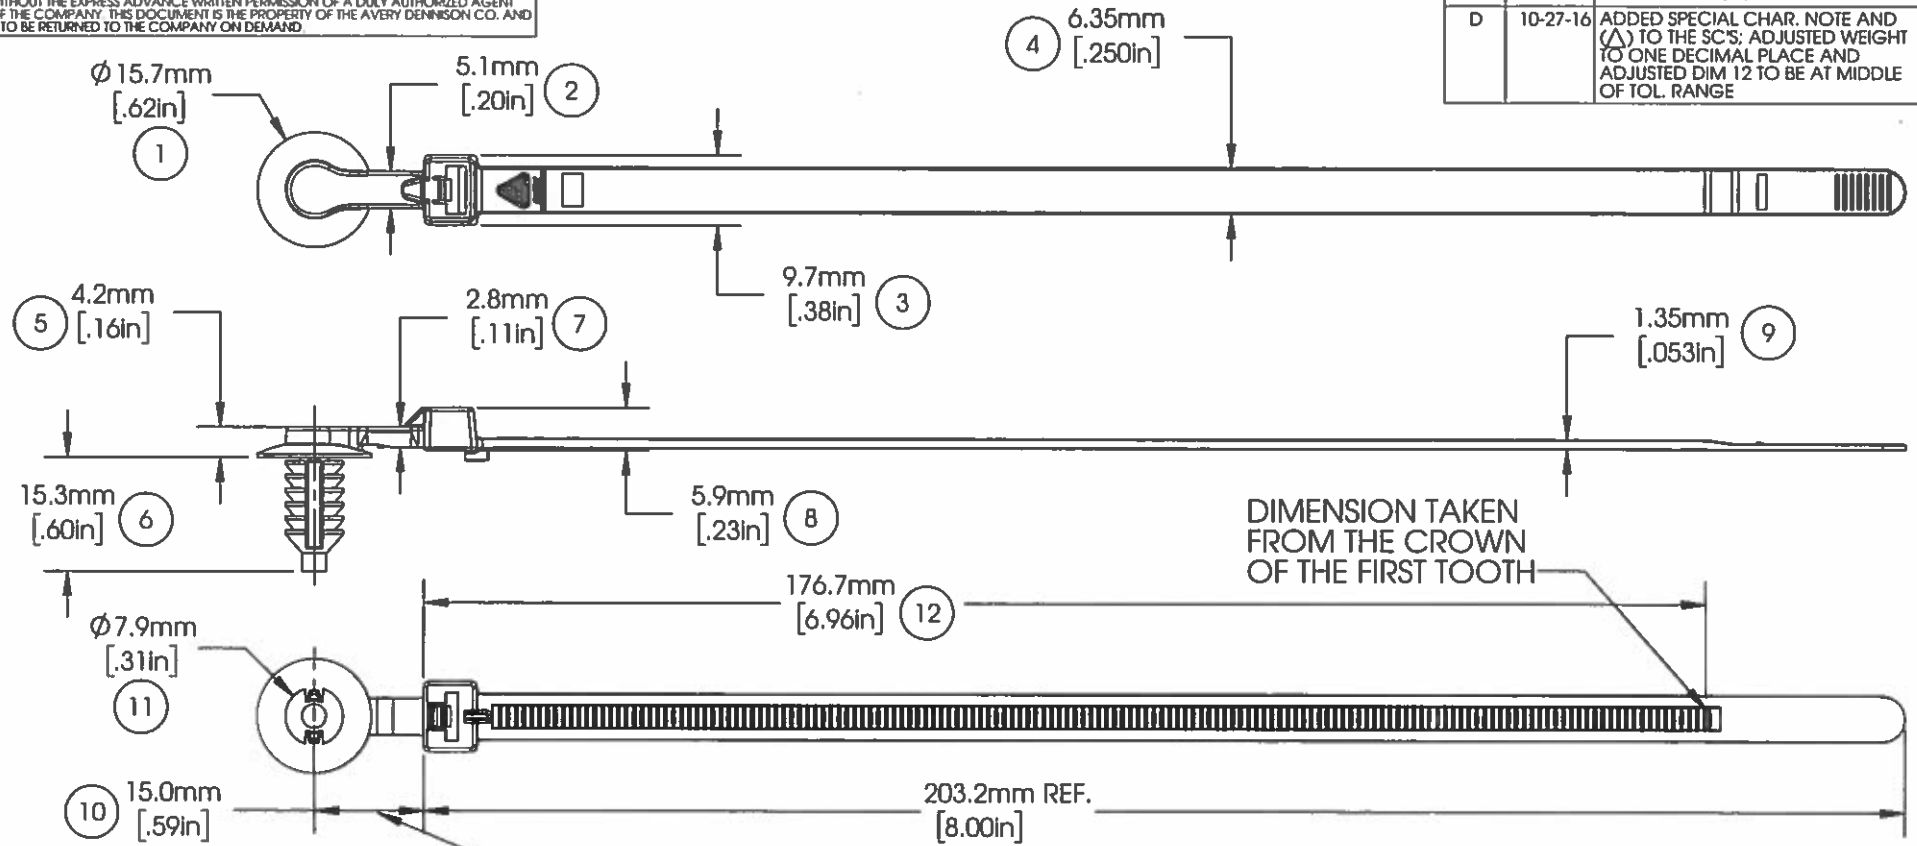

DIMENSION TAKEN FROM THE CROWN OF THE FIRST TOOTH

DIMENSION TAKEN FROM THE BASE OF THE FIR TREE

NOTES:
1. SPECIAL CHARACTERISTICS ARE NOTED BY A TRIANGLE (Δ)

13	Δ FLAMMABILITY:	HB RATED PER FMVSS302
14	Δ TENSILE STRENGTH:	50 LBF / 222.4N MIN.
	MOUNTING:	Ø6.60mm ± 0.25mm HOLE AND 6.35mm HEX HOLE. PANEL THICKNESS OF 0.7mm TO 7.0mm.
	TEMPERATURE RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
	WEIGHT:	2.5g
	BUNDLE DIAMETER:	Ø 1/16" (1.6mm) TO Ø 1- 7/8" (47.6mm)
	INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	500/BAG, 10 BAGS/MASTER

APPROVALS: ENG. APPR. *[Signature]* 10/27/16
Q.A. APPR. *[Signature]* 10/27/16

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES	MATERIAL	DESCRIPTION
INCHES	NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED	15mm LIFT OFFSET TIE - REV.
mm		
.XX ± .03		
.XXX ± .010	COLOR GREY	STOCK NO. 20129-0
ANGULAR: ± 2°		REV. D