



# AVERY DENNISON MARKETING SPECIFICATION

## HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

REV.	DATE	DESCRIPTION
B	07-18-12	ADDED BALLOON 11 AND CHANGED TOLERANCE ON BALLOON 10; CHG GEO. TO SHOW THE NEW RIB; AND WEIGHT CHG

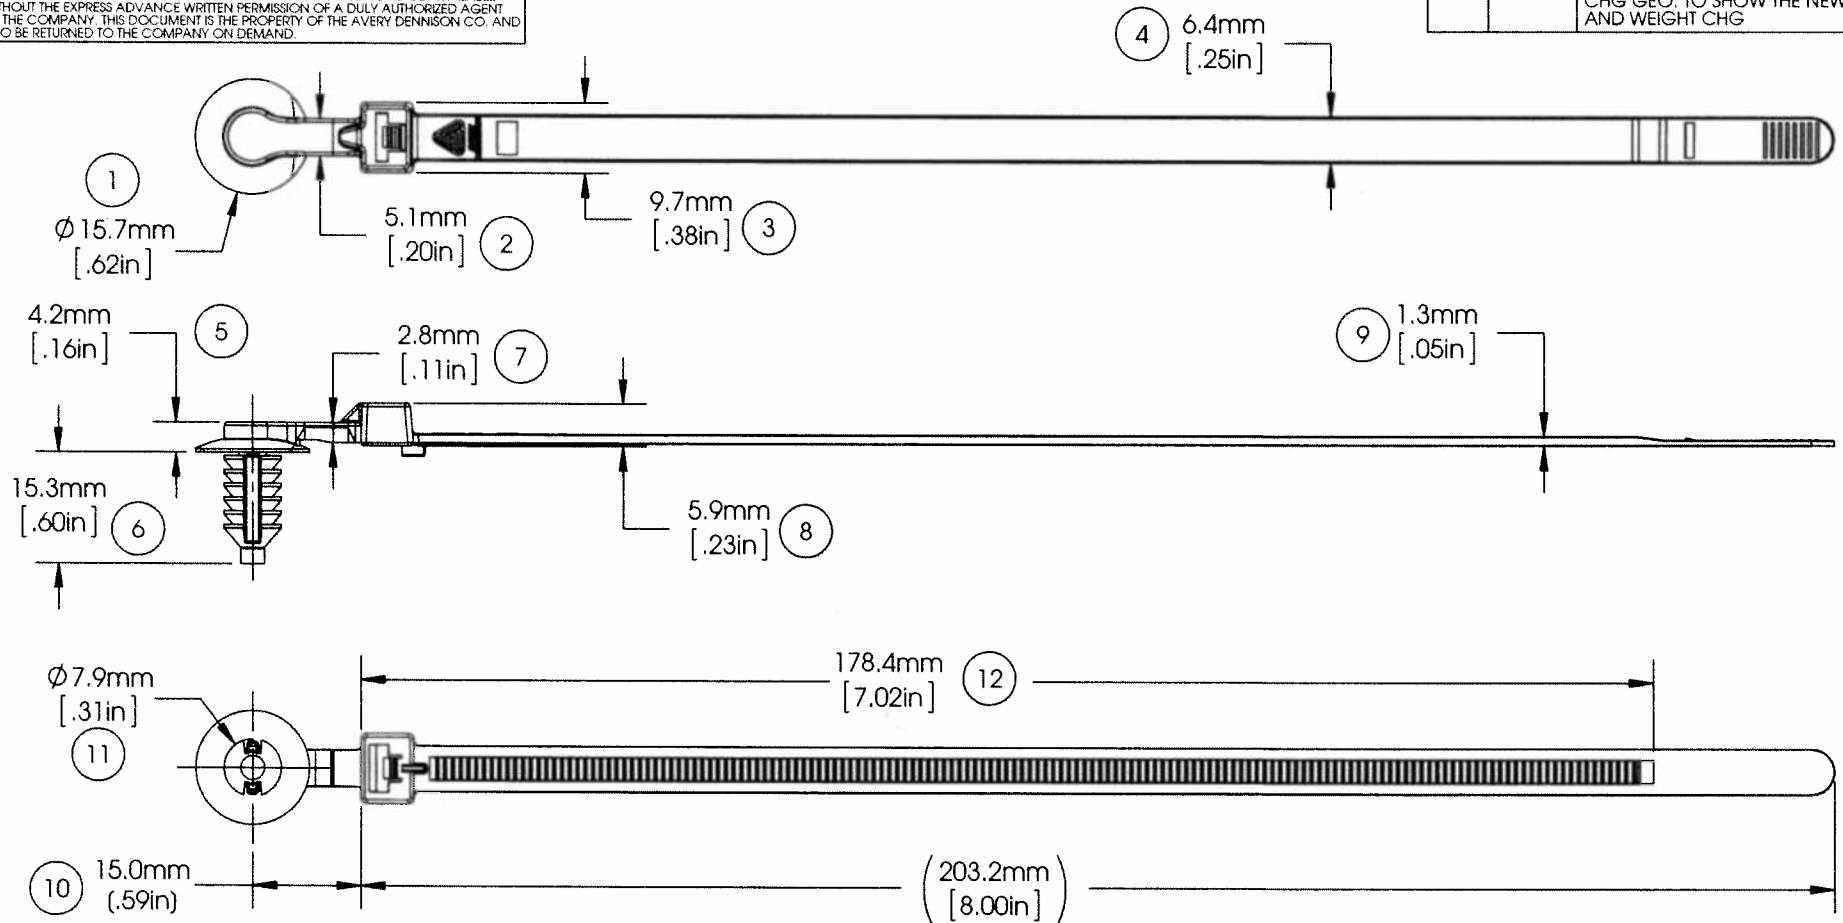

MOUNTING:	Ø 6.60MM ± 0.25MM HOLE AND 6.35MM HEX HOLE. PANEL THICKNESS OF 0.7MM TO 7.0MM.	APPROVALS:	ENG. APPR. <i>[Signature]</i> 9/11/12	 <b>AVERY DENNISON</b> <small>FASTENER DIVISION                      FITCHBURG, MA 01420 U.S.A.                      TEL. 1-800-225-5913                      FAX. 978-353-8157</small>
TENSILE STRENGTH:	50 LBF / 222.4N MIN.		Q.A. APPR. <i>[Signature]</i> 9/11/12	
TEMPERATURE RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE			
WEIGHT:	2.46 GRAMS EACH	SPECIFIED TOLERANCES	MATERIAL	DESCRIPTION
BUNDLE DIAMETER:	Ø 1/16" (1.6MM) TO Ø 1-7/8" (47.6MM)		INCHES	
INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL	.XX ± .03	.X ± .7	DESCRIPTION
TOOL TENSION SETTING:	6 - 8	.XXX ± .01	.XX ± .25	
PACKAGING:	500/BAG, 10 BAGS/MASTER	ANGULAR: ± 2°	COLOR	STOCK NO.
			BLACK	20135-0
				REV.
				B