



# AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

## HISTORY

REV.	DATE	DESCRIPTION
A	14DEC12	PRODUCTION RELEASE
B	20DEC13	CHG DIM 8; ADDED NOTE DIM 10 TO CROWN OF TOOTH
C	05JAN16	CHG THE PRIMARY DIM TO mm; MODIFIED DIM 8 TO BE 155.0mm

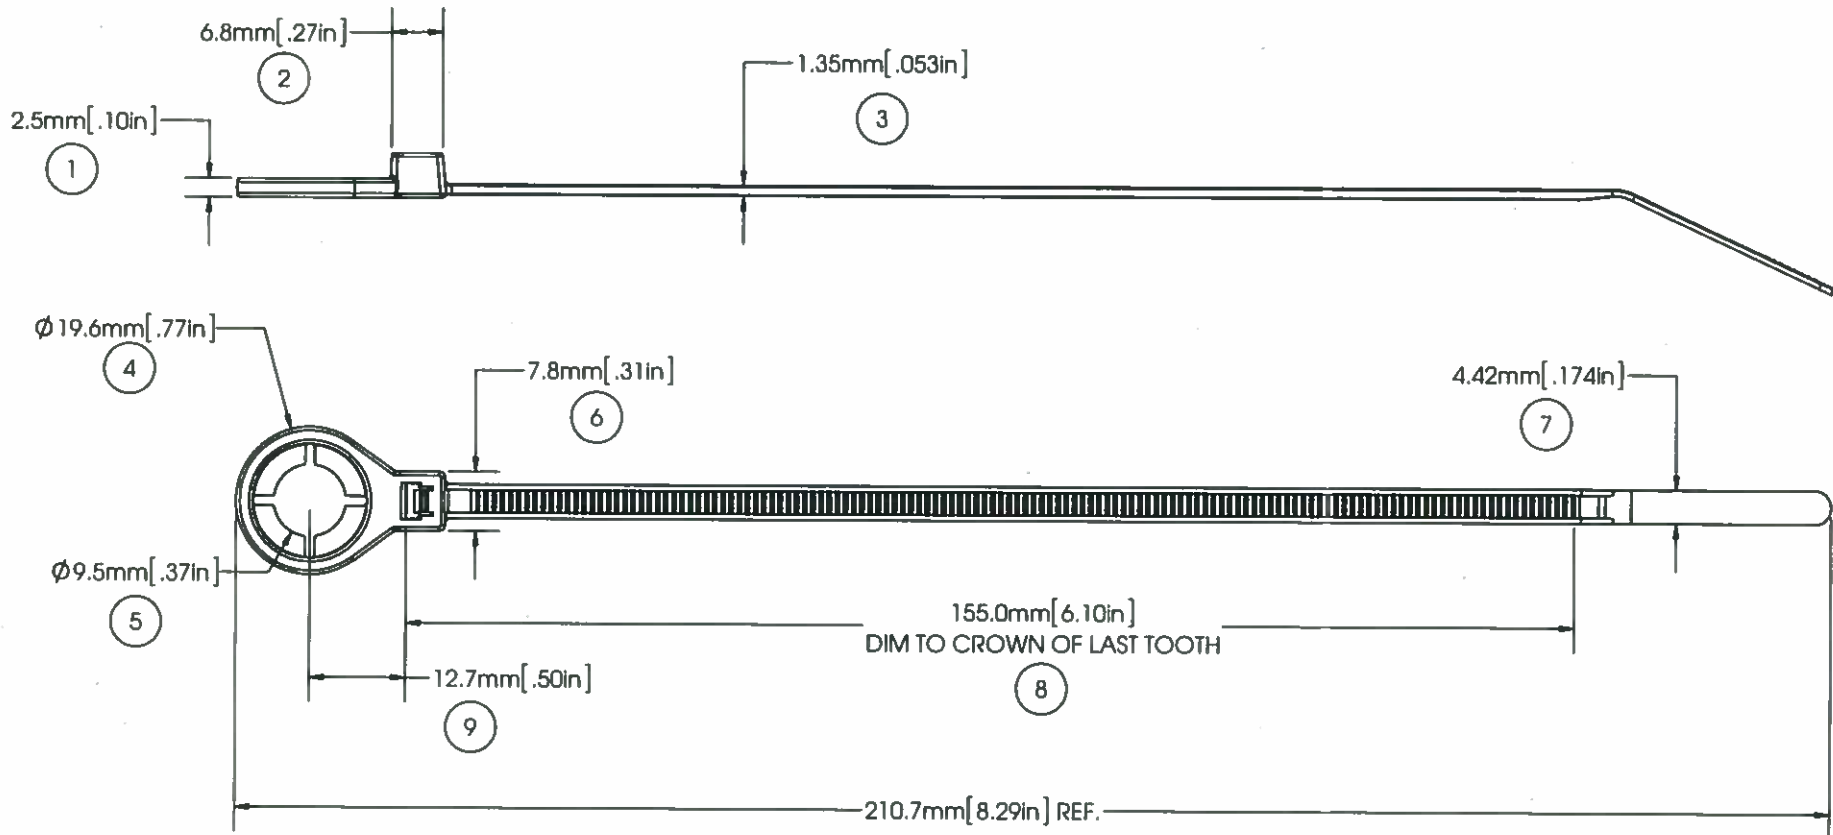

MOUNTING:	M10 STUD	APPROVALS:	ENG. APPR. <i>[Signature]</i> 11/5/16	 <b>AVERY DENNISON</b> <small>FASTENER DIVISION                      FITCHBURG, MA 01420 U.S.A.                      TEL: 1-800-225-5913                      FAX: 978-353-8157</small>
TENSILE STRENGTH:	50 LBF / 222N MIN.		Q.A. APPR. <i>[Signature]</i> 11/5/16	
WEIGHT:	1.42 g	SPECIFIED TOLERANCES ARE:	MATERIAL	DESCRIPTION
TEMPERATURE RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE		.XX ± .03 INCHES    .X ± .7 mm .XXX ± .010 INCHES    .XX ± .25 mm ANGULAR: ± 2°	NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED
BUNDLE DIAMETER:	Ø 6.4mm TO Ø 44.5mm		COLOR	STOCK NO.
TOOL:	12500- HAND INSTALLATION TOOL 12500- PNUEM. INSTALLATION TOOL		<b>BLACK</b>	<b>20139-0</b>
TOOL TENSION SETTING:	6 - 8			REV.
PACKAGING:	500/BAG, 10 BAGS/MASTER			<b>C</b>

5

4

3

2

1