AVERY DENNISON MARKETING SPECIFICATION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

HISTORY		
REV.	DATE	DESCRIPTION
A	11-12-13	RELEASED

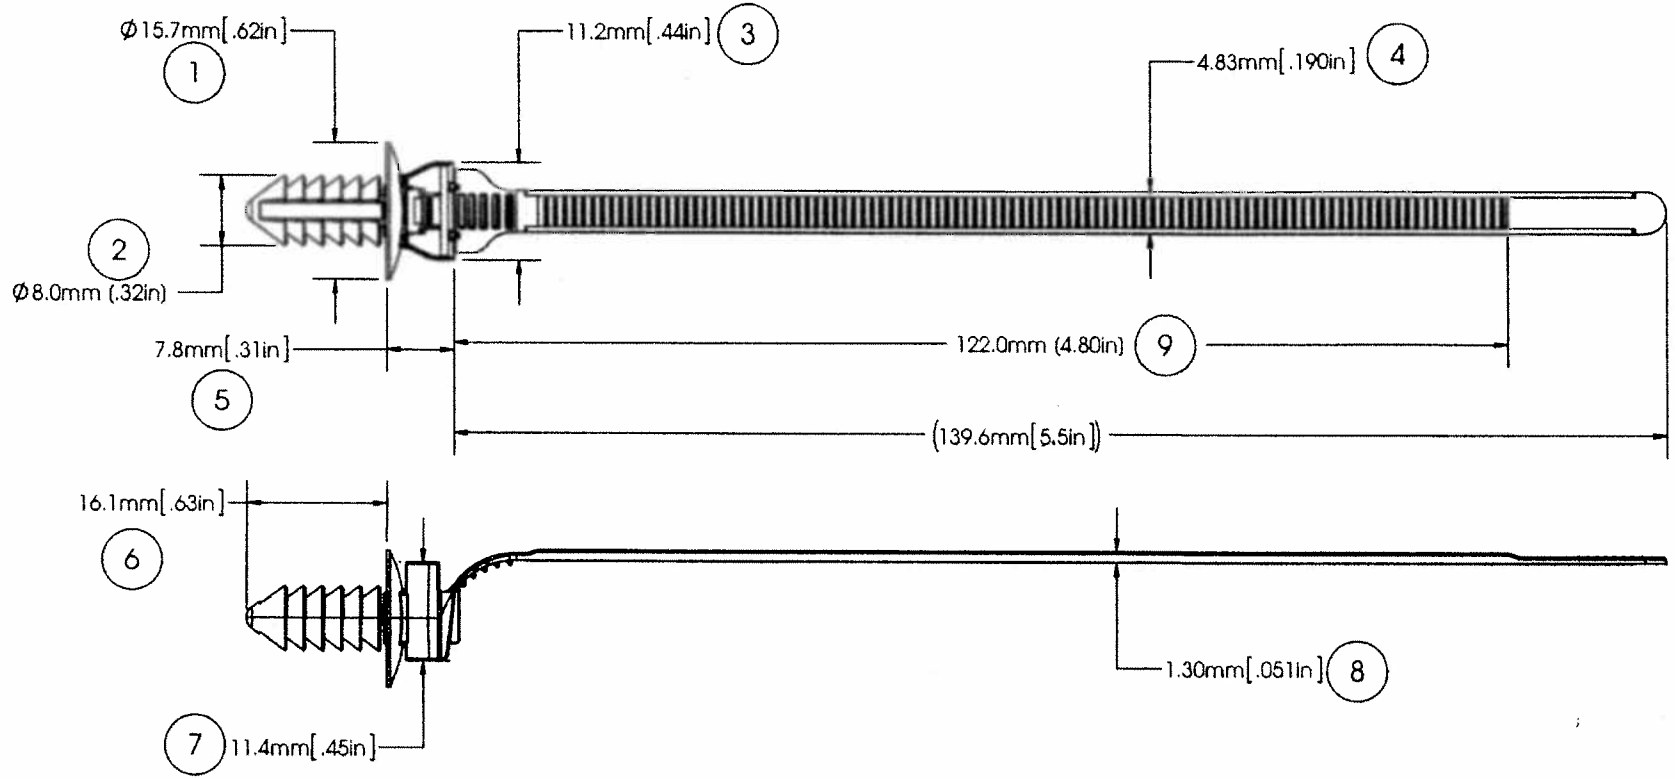

MOUNTING:	Ø6.6MM ± 0.25MM HOLE AND 6.35MM HEX HOLE. PANEL THICKNESS OF 0.7MM TO 7MM.
TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
OPERATING TEMP RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
WEIGHT:	1.64 GRAMS
BUNDLE DIAMETER:	Ø1.6MM TO Ø35.0MM
TOOL:	AVERY DENNISON PART NO. 12001-0 AND 12500-0
TOOL TENSION SETTING:	6 - 8
PACKAGING:	1000/BAG, 5 BAGS/MASTER

APPROVALS:

ENG. APPR. 11/12/13

Q.A. APPR. 11/19/13

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES .X ± .7 MM

.XXX ± .01 INCHES .XX ± .25 MM

ANGULAR: ± 2°

MATERIAL **NYLON 6/6, IMPACT MODIFIED, HEAT STAB.**

COLOR **BLACK**

AVERY DENNISON
FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION **LOW INSERTION FIR TREE, 5.5" Tie**

STOCK NO. **20140-0**

REV. **A**

5 4 3 2 1