


AVERY DENNISON MARKETING SPECIFICATION

© 2026 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

ENG	REV.	DATE	DESCRIPTION
DMG	A	09-30-14	RELEASED
PP	B	10/15/26	UPDATED FORMAT MADE 138.8mm AS A REF. DIM. ADDED FLAMMABILITY AND NOTE 1

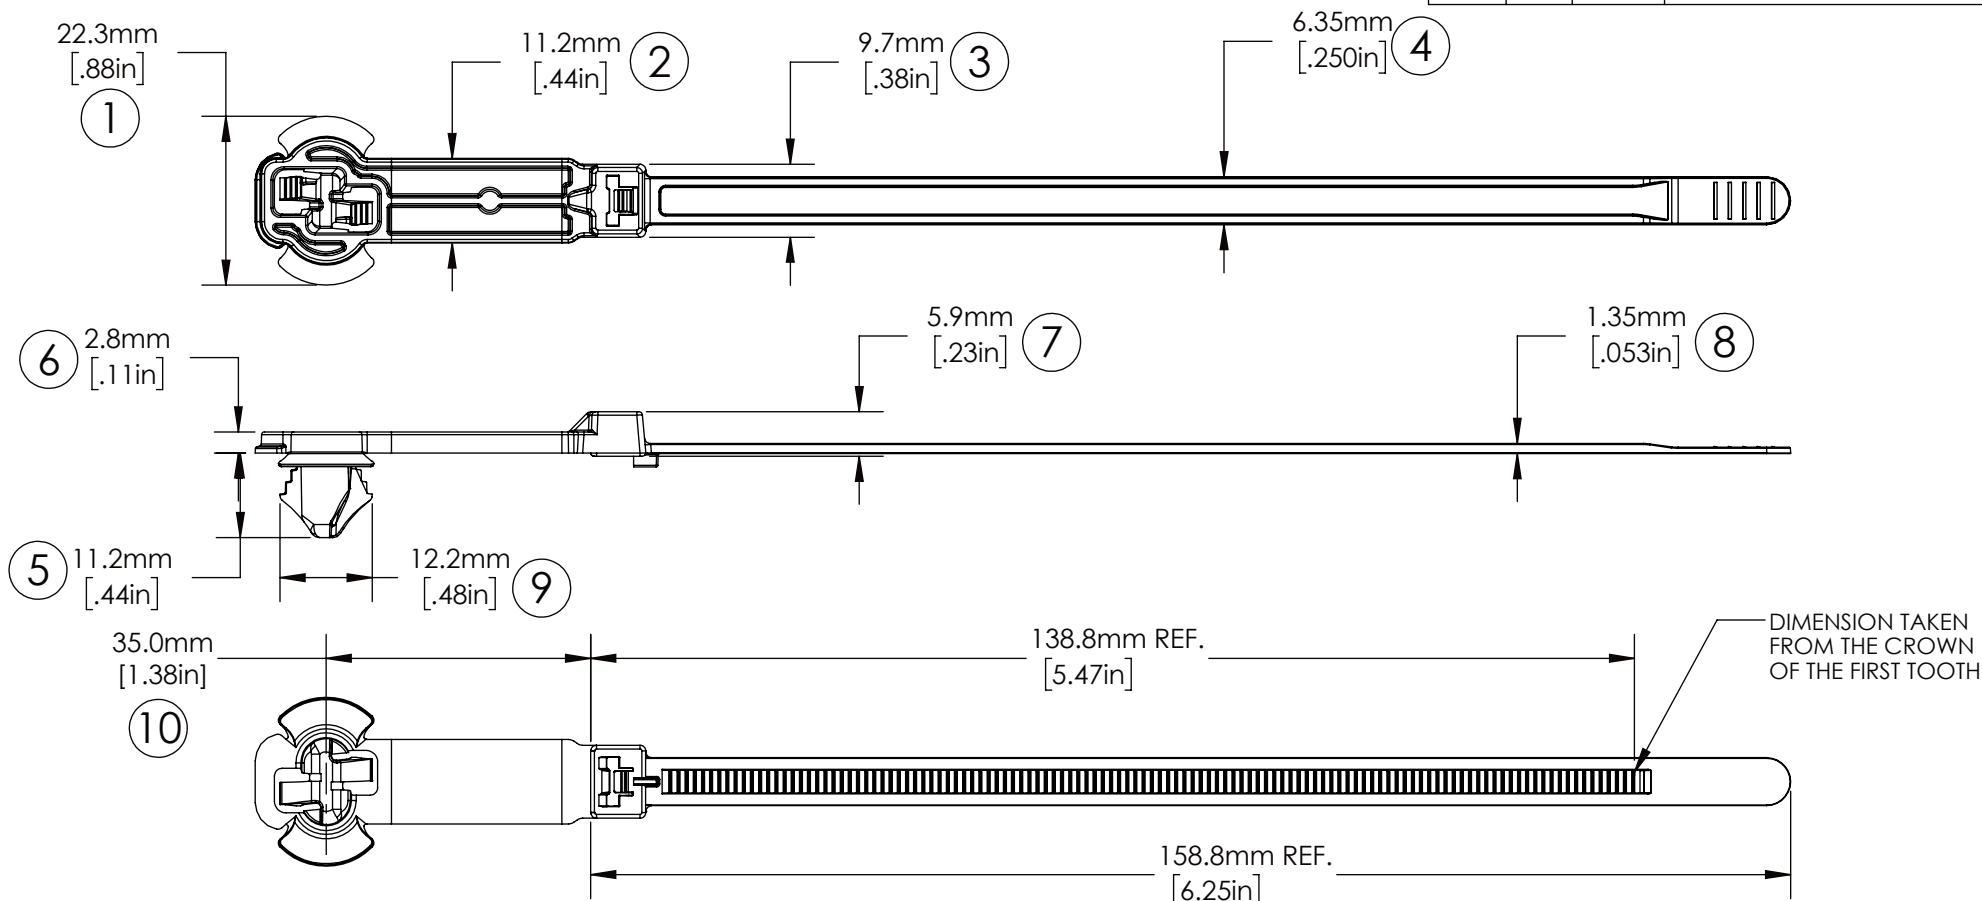

11	△	FLAMMABILITY:	TESTED & APPROVED PER FMVSS302
		MOUNTING:	7mm X12mm MIN. SLOTTED HOLE
		PANEL THICKNESS RANGE:	0.6mm TO 3.0mm THK.
12	△	TENSILE STRENGTH:	50 LBF / 222.4N MIN.
		OPERATING TEMP RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
		WEIGHT:	2.82 GRAMS EACH
		BUNDLE DIAMETER:	Ø .06" [1.6mm] TO Ø 1.50" [38.1mm]
		INSTALLATION TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
		TOOL TENSION SETTING:	6 - 8
		PACKAGING:	1000/BAG, 5 BAGS/MASTER

NOTES:
1. △ = INDICATES SPECIAL CHARACTERISTIC

APPROVALS:	ENG. APPR.	<i>Parth Patel</i>	10.15.26
	Q.A. APPR.	<i>Abraham Rocha</i>	10.15.26
SPECIFIED TOLERANCES		MATERIAL NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED	
INCHES		COLOR	
.XX ± .03		BLACK	
.XXX ± .010			
ANGULAR: ± 2°			



AVERY DENNISON

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL: 1-800-225-5913
FAX: 978-353-8157

DESCRIPTION		STOCK NO.	
OFFSET SLOT TIE, 35mm STD		20148-0	
		REV.	
		B	