



AVERY DENNISON MARKETING SPECIFICATION

HISTORY

THE SUBJECT MATTER DISCLOSED HEREIN IS UNLESS OTHERWISE INDICATED PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

| REV. | DATE | DESCRIPTION |
|------|----------|-------------|
| A | 04-14-15 | RELEASED |

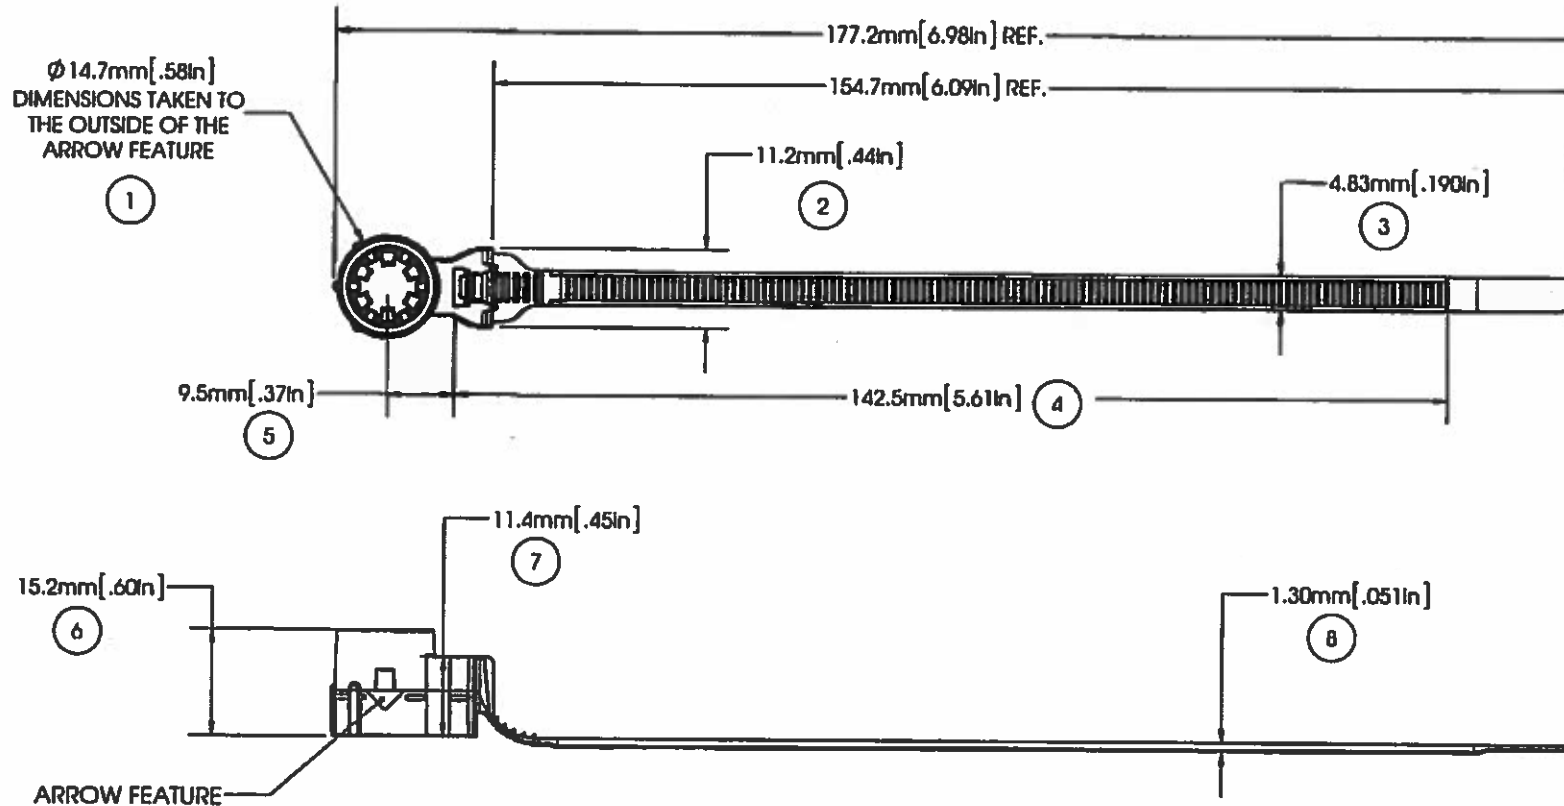

| | | | | |
|-----------------------|---|---------------------------|---------------------------------------|--|
| MOUNTING: | M8 X 1.25 STUD | APPROVALS: | ENG. APPR. <i>[Signature]</i> 4/14/15 |  AVERY DENNISON <small>FASTENER DIVISION RICHBURG, MA 01460 U.S.A. TEL: 1-800-225-9113 FAX: 978-353-8187</small> |
| TENSILE STRENGTH: | 50 LBF / 222N MIN. | | Q.A. APPR. <i>[Signature]</i> 4/14/15 | |
| WEIGHT: | 2.69g | SPECIFIED TOLERANCES ARE: | | MATERIAL NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED COLOR BLACK |
| TEMPERATURE RANGE: | -40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE | .XX ± .03 INCHES | .X ± .7 mm | |
| BUNDLE DIAMETER: | $\varnothing 1.6\text{mm}$ TO $\varnothing 38.1\text{mm}$ | .XXX ± .010 INCHES | .XX ± .25 mm | STOCK NO. 20152-0 |
| TOOL: | 12001- HAND INSTALLATION TOOL 12500- PNUM. INSTALLATION TOOL | ANGULAR: ± 2° | | REV. A |
| TOOL TENSION SETTING: | 6-8 | | | |
| PACKAGING: | 1000/BAG, 5 BAGS/MASTER | | | |

5 4 3 2 1