


AVERY DENNISON MARKETING SPECIFICATION

HISTORY

REV.	DATE	DESCRIPTION
A	4/2/20	RELEASED TO PRODUCTION

THE SUBJECT MATTER DISCLOSED HEREIN EMBODIES PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF THE AVERY DENNISON CO. NONE OF WHICH SHALL BE COPIED, REPRODUCED, DISCLOSED TO OTHERS, PUBLISHED OR USED IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS BEING MADE AVAILABLE WITHOUT THE EXPRESS ADVANCE WRITTEN PERMISSION OF A DULY AUTHORIZED AGENT OF THE COMPANY. THIS DOCUMENT IS THE PROPERTY OF THE AVERY DENNISON CO. AND IS TO BE RETURNED TO THE COMPANY ON DEMAND.

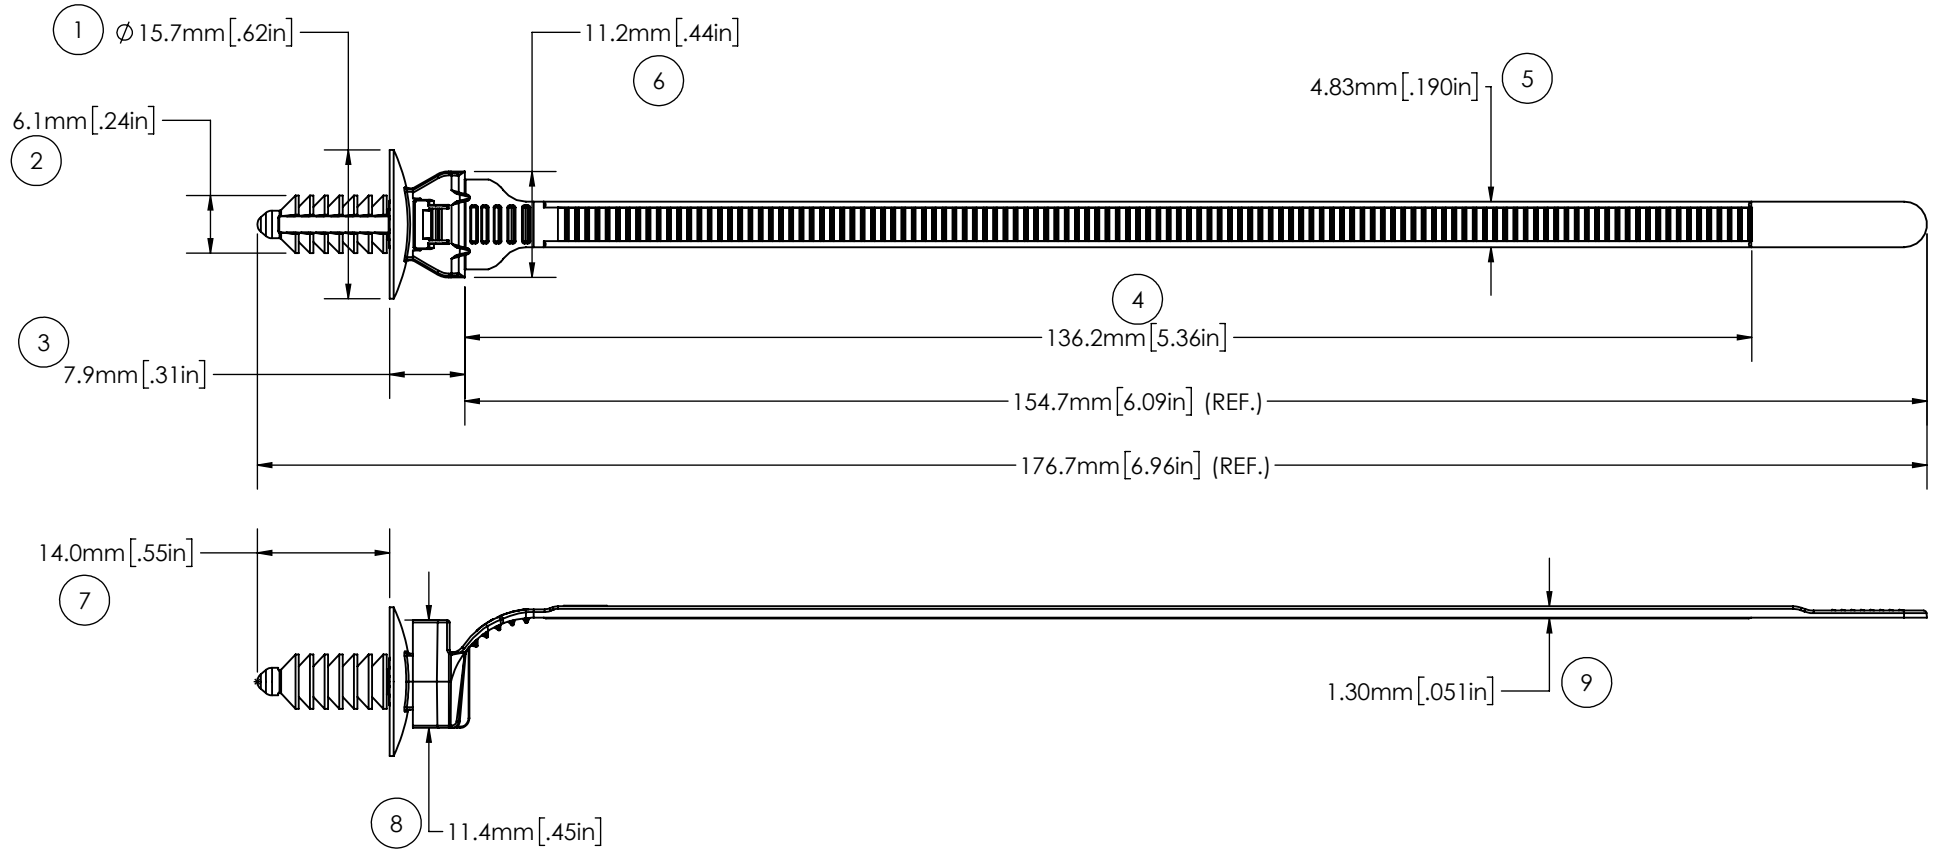

10	FLAMMABILITY RATING:	HB-2 RATED PER FMVSS302
11	TENSILE STRENGTH:	50 LBF / 222N MIN.
	PANEL THICKNESS RANGE:	1.0mm TO 7.0mm
	MOUNTING:	M6 THREADED HOLE
	OPERATING TEMP RANGE:	-40°F (-40°C) TO 302°F (150°C) CONTINUOUS AND 329°F (165°C) AT MAXIMUM EXPOSURE
	WEIGHT:	1.52 GRAMS
	BUNDLE DIAMETER:	$\varnothing 1.6\text{mm}$ TO $\varnothing 38.1\text{mm}$
	TOOL:	12001- HAND INSTALLATION TOOL 12500- PNEUM. INSTALLATION TOOL
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	1000/BAG, 5 BAGS/MASTER

△ INDICATES SPECIAL CHARACTERISTICS

APPROVALS:	ENG. APPR.	<i>Michael O'Regan</i>	4/2/20
	Q.A. APPR.	<i>Rick Estano</i>	4/2/20



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES .X ± .7 MM
.XXX ± .010 INCHES .XX ± .25 MM
ANGULAR: ± 2°

MATERIAL **NYLON 6/6, IMPACT
MODIFIED HEAT STABILIZED
HIGH HEAT**

COLOR
BROWN

DESCRIPTION
M6 THREADED LIFT™ TIE, HIGH HEAT

STOCK NO.
20154-HHBN

REV.
A