


AVERY DENNISON MARKETING SPECIFICATION

© 2023 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
A	6/15/23	INITIAL RELEASE

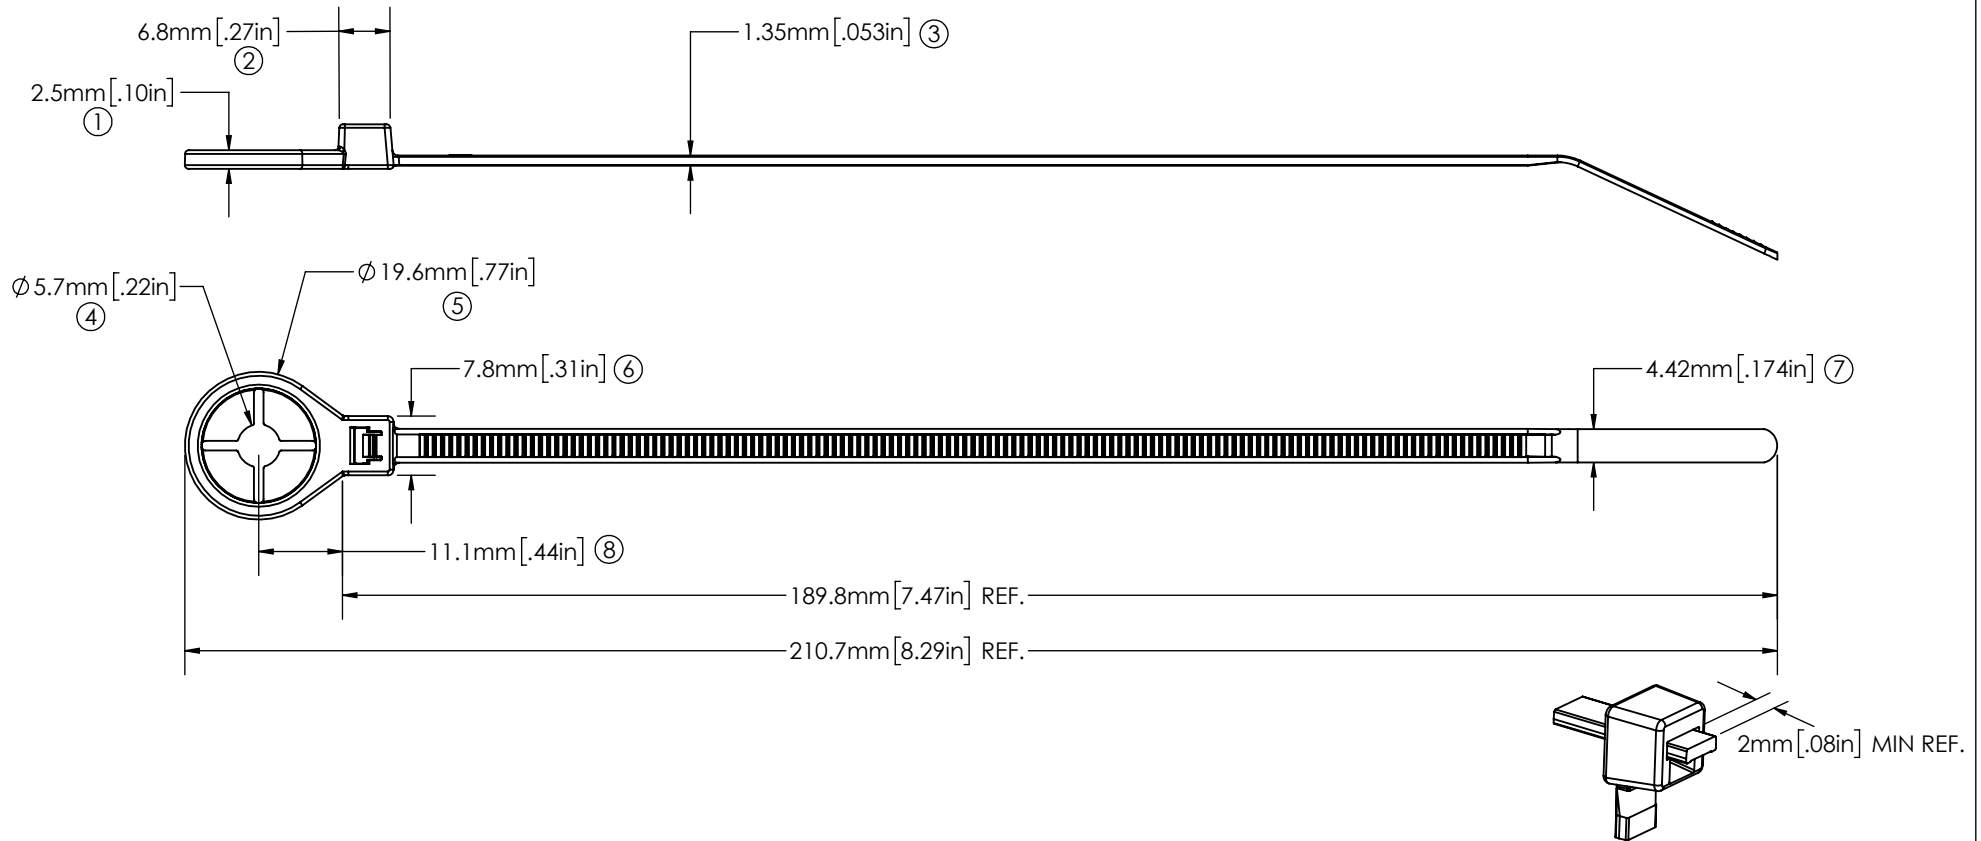

RECOMMENDED CUT LENGTH

△ 9
△ 10

FLAMMABILITY:	FMVSS302
TENSILE STRENGTH:	50 lbf / 222N MIN.
MOUNTING:	M6 STUD
OPERATING TEMP RANGE:	-40°F (-40°C) TO 239°F (115°C) CONTINUOUS AND 257°F (125°C) AT MAXIMUM EXPOSURE
WEIGHT:	1.7g
BUNDLE DIAMETER:	Ø 1.6mm TO Ø 44.5mm
TOOL:	12001 - HAND TOOL 12500 - PNEUMATIC TOOL
TOOL TENSION SETTING:	6 - 8
PACKAGING:	500/BAG, 10 BAGS/MASTER

NOTES:

1. SPECIAL CHARACTERISTICS ARE NOTED BY A TRIANGLE (△)

APPROVALS:

ENG. APPR.	Chris Strakus 6/15/23
Q.A. APPR.	William O'Malley 6/15/23

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES	.X ± .7 mm
.XXX ± .010 INCHES	.XX ± .25 mm
ANGULAR: ± 2°	

MATERIAL

**NYLON 6/6,
IMPACT MODIFIED, HEAT STABILIZED**

COLOR

BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION

M6 THREADED MOUNT TIE

STOCK NO.

20360-0

REV.

A