



Fastener
Solutions

7.5" Identification Ties Marketing Specifications


For the following part numbers:

08413-0

08419-0

August 1, 2018

AVERY DENNISON MARKETING SPECIFICATION

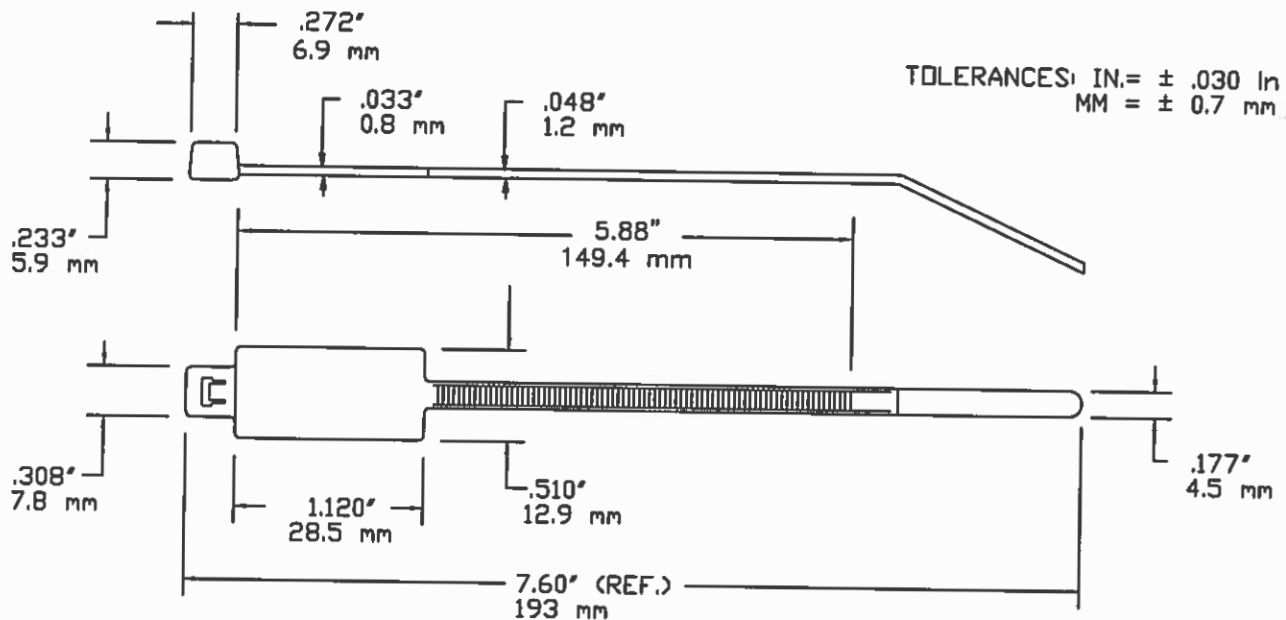

NOT TO SCALE


LOOPED TENSILE STRENGTH:	50 Lbsf. / 220N MINIMUM PER MIL-S-23190.
MILITARY STANDARD:	MS-3368-1-9A
MATERIAL:	NYLON 6/6
WEIGHT:	.04590 oz. / 1.35 grams
BUNDLE DIAMETER:	$\emptyset 0.375$ "/9.53mm to 1.75"/44.0mm
MIN. INSTALLATION TEMP:	32°F (0°C)
OPERATING TEMPERATURE:	-40°F (-40°C) to 185°F (85°C)
APPLICATION TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP. AVERY DENNISON PART NUMBER 12001.
TOOL TENSION SETTING:	6-8
PACKAGED IN:	1000 PACKS IN SEALED BAGS (100 PACKS AVAILABLE)

PLENUM RATED AND HAS A FLAMMABILITY RATING OF V-2
UL APPLICATIONS REQUIRE USE WITHIN ENCLOSURES.



**AVERY
DENNISON**

FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
MA 978-353-8157



DESCRIPTION:

7.5" CABLE TIE, STANDARD
IDENTIFICATION - NATURAL

APPROVAL: Q.A.:


Anda Boyle 4-1-2016

STOCK NO.

08413-0

REV
K

AVERY DENNISON MARKETING SPECIFICATION

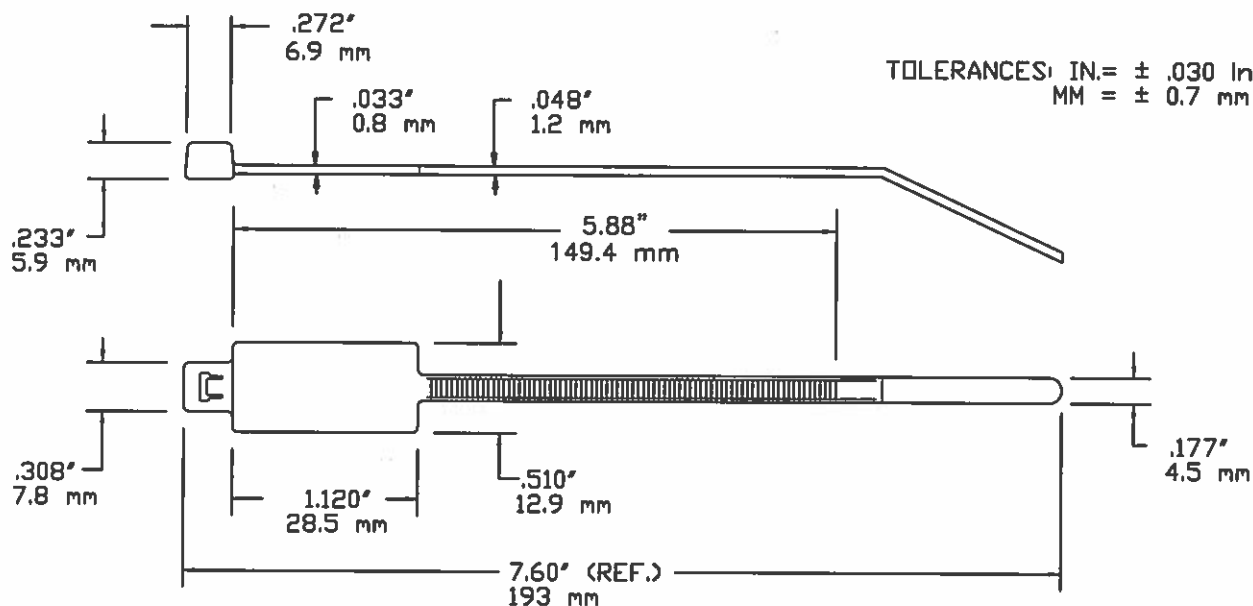

NOT TO SCALE

LOOPED TENSILE STRENGTH:	50 Lbsf. / 220N MINIMUM PER MIL-S-23190.
MILITARY STANDARD:	MS-3368-1-9A
MATERIAL:	NYLON 6/6
WEIGHT:	.04590 oz. / 1.35 grams
BUNDLE DIAMETER:	$\phi 0.375$ "/9.53mm to 1.75"/44.0mm
MIN. INSTALLATION TEMP:	32°F (0°C)
OPERATING TEMPERATURE:	-40°F(-40°C) to 185°F(85°C)
APPLICATION TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP. AVERY DENNISON PART NUMBER 12001.
TOOL TENSION SETTING:	6-8
PACKAGED IN:	100 PACKS IN SEALED BAGS

PLENUM RATED AND HAS A FLAMMABILITY RATING OF V-2
UL APPLICATIONS REQUIRE USE WITHIN ENCLOSURES.



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
MA 978-353-8157



DESCRIPTION:

7.5" CABLE TIE, STANDARD
IDENTIFICATION - NATURAL

APPROVAL: Q.A.:

Linda Boyle 4-1-2016

STOCK NO.

08419-0

REV

B