



**AVERY
DENNISON**

Fastener
Solutions

Adhesive Mounts Marketing Specifications

For the following part numbers:

08461-2 Acrylic
08462-2 Acrylic
10029-2 Rubber Based
10030-2 Rubber Based


April 23, 2025

AVERY DENNISON MARKETING SPECIFICATION

© 2020 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
B	5/15/24	REMOVED NON-EXISTENT FEATURE AND UL LOGO

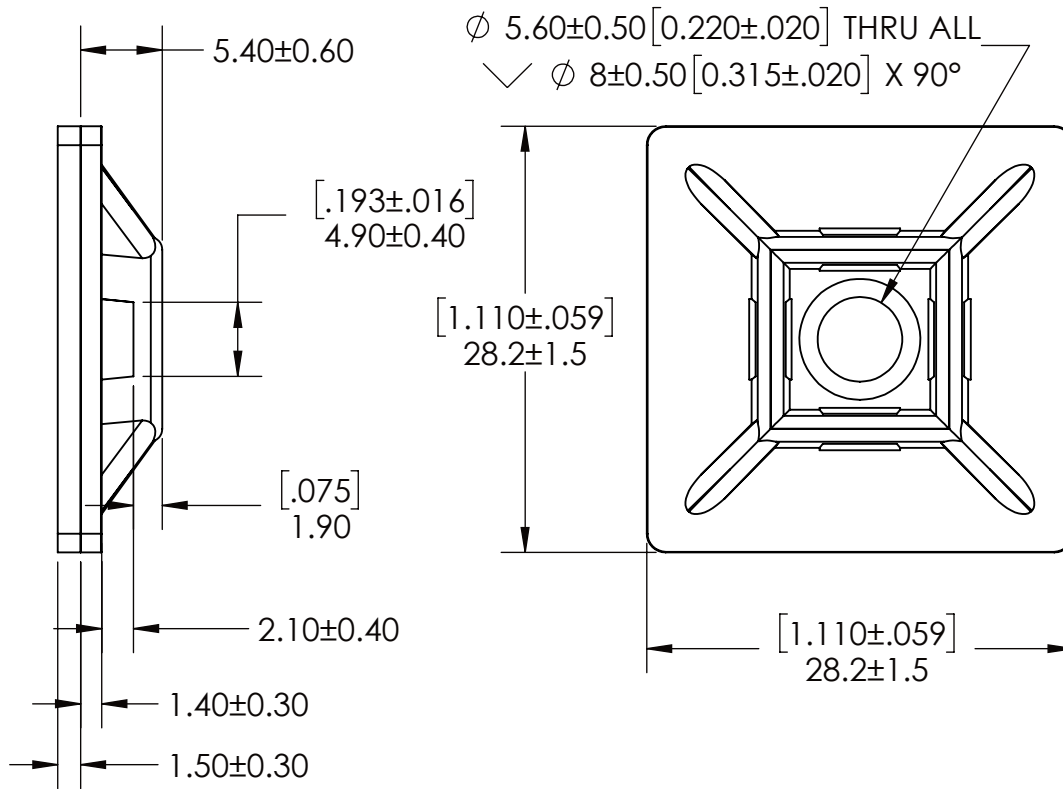

NOTES:

1. MATERIAL: POLYAMIDE 6.6 NATURAL+ ACRYLIC ADHESIVE TAPE
2. THESE MOUNTS HAVE A FLAMMABILITY RATING OF V-2
3. HUMIDITY ABSORPTION: 2.7% - 2.8% (23° C - 50% R.H.)
4. INSTALLATION TEMPERATURE: -10° C MINIMUM - +50° C MAXIMUM (14° - 122°F)
5. OPERATING TEMPERATURE: -30° C - +85° C (-22° - 185°F)
6. LOOP TENSILE STRENGTH: 50 LBF (220N) MIN


WEIGHT, PP:		N/A	BAG QUANTITY:		100	APPLICATION TOOL	
WEIGHT, NYLON:		1.495 g (EST)	BOX QUANTITY:		1,000	ADHESIVE MOUNTING	
			CASE QUANTITY:		5,000		
APPROVALS:		ENG. APPR.		J. Richardson 10.10.22		 FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157	
		Q.A. APPR.		William O' Malley 07.17.23			
SPECIFIED TOLERANCES ARE:			MATERIAL			DESCRIPTION	
X. ± 1.0 mm [.04 IN] .XX ± .25 mm [.010 IN]			SEE NOTES			1" CABLE TIE MOUNT, ACRYLIC ADHESIVE	
.X ± .5 mm [0.02 IN] .XXX ± .100 mm [.004 IN]			COLOR			STOCK NO.	
ANGULAR: ± 2°			SEE NOTES			08462-2	
						REV. B	

AVERY DENNISON MARKETING SPECIFICATION

© 2020 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
A	12/18/23	INITIAL RELEASE
B	06/21/24	REMOVED UL LOGO

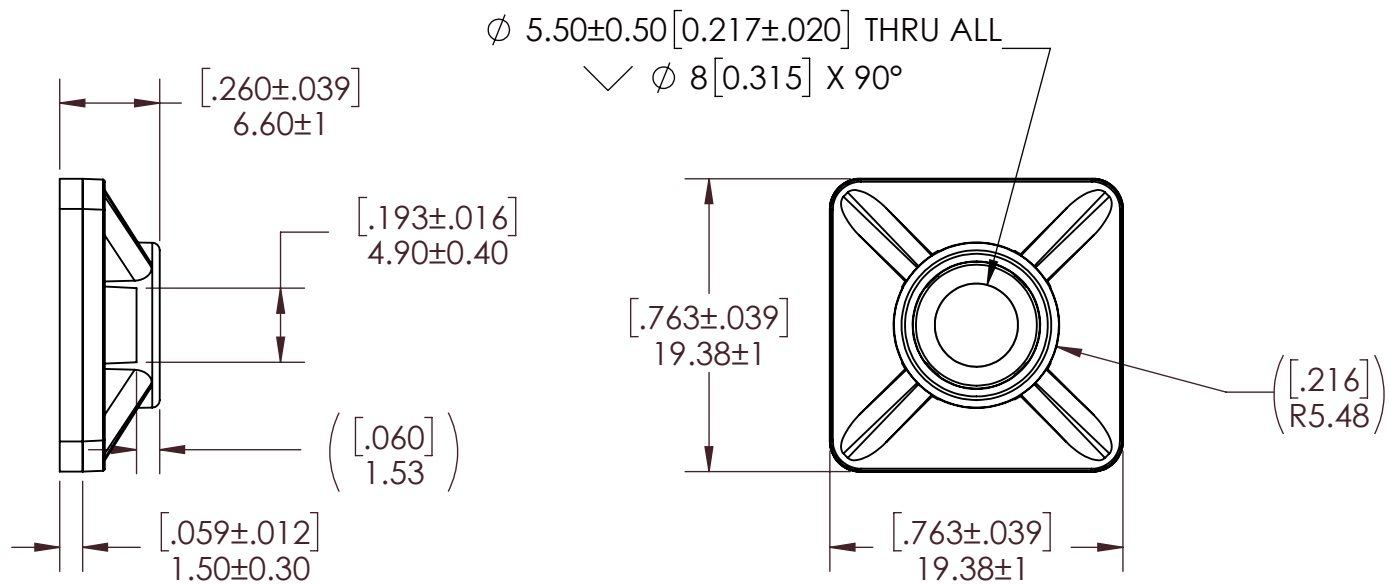

NOTES:

1. MATERIAL: POLYAMIDE 6.6 NATURAL+ACRYLIC ADHESIVE TAPE
2. THESE MOUNTS HAVE A FLAMMABILITY RATING OF V-2
3. HUMIDITY ABSORPTION: 2.7% - 2.8% (23° C - 50% R.H.)
4. INSTALLATION TEMPERATURE: -10° C MINIMUM - +50° C MAXIMUM (14° - 122°F)
5. OPERATING TEMPERATURE: -30° C - +85° C (-22° - 185°F)
6. LOOP TENSILE STRENGTH: 40 LBF (180N) MIN


WEIGHT, PP:		N/A	BAG QUANTITY:		100	APPLICATION TOOL	
WEIGHT, NYLON:		0.767 g (EST)	BOX QUANTITY:		1,000	ADHESIVE MOUNTING	
			CASE QUANTITY:		5,000		
<u>APPROVALS:</u>		ENG. APPR.	<i>J Richardson</i> 10.10.22			 FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157	
		Q.A. APPR.	<i>William O' Malley</i> 07.17.23				
<u>SPECIFIED TOLERANCES ARE:</u>			MATERIAL		DESCRIPTION		
X. $\pm$ 1.0 mm [.04 IN] .XX $\pm$.25 mm [.010 IN]			SEE NOTES		3/4" CABLE TIE MOUNT, ACRYLIC ADHESIVE		
.X $\pm$.5 mm [0.02 IN] .XXX $\pm$.100 mm [.004 IN]			COLOR		STOCK NO.		REV.
ANGULAR: $\pm$ 2°			SEE NOTES		08461-2		B

AVERY DENNISON MARKETING SPECIFICATION

© 2020 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
A	12/18/23	INITIAL RELEASE
B	06/21/24	REMOVED UL LOGO

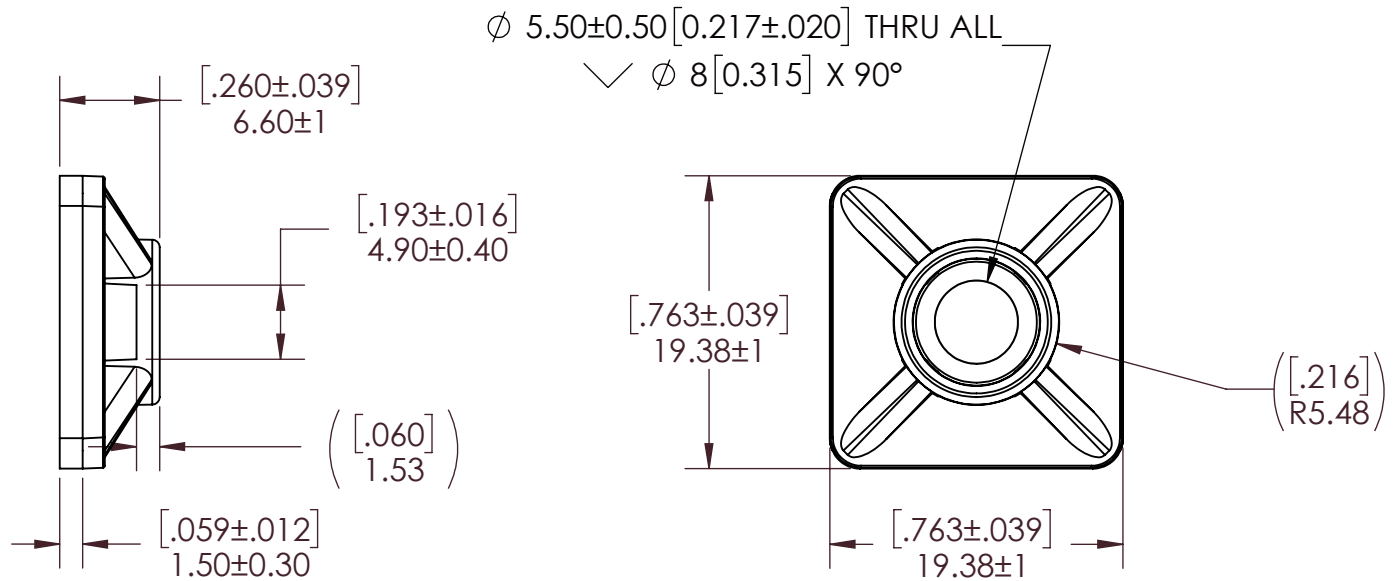

NOTES:

1. MATERIAL: POLYAMIDE 6.6 NATURAL+ RUBBER ADHESIVE TAPE
2. THESE MOUNTS HAVE A FLAMMABILITY RATING OF V-2
3. HUMIDITY ABSORPTION: 2,7% - 2,8% (23° C - 50% R.H.)
4. INSTALLATION TEMPERATURE: -10° C MINIMUM - +50° C MAXIMUM (14° - 122°F)
5. OPERATING TEMPERATURE: -30° C - +85° C (-22° - 185°F)
6. LOOP TENSILE STRENGTH: 40 LBF (180N) MIN

WEIGHT, PP:	N/A	BAG QUANTITY:	100	APPLICATION TOOL
WEIGHT, NYLON:	0.925 g (EST)	BOX QUANTITY:	1,000	ADHESIVE MOUNTING
		CASE QUANTITY:	5,000	
APPROVALS:	ENG. APPR.	J Richardson 10.10.22		
	Q.A. APPR.	William O' Malley 07.17.23		
SPECIFIED TOLERANCES ARE:		MATERIAL	DESCRIPTION	
X. ± 1.0 mm [0.04 IN] .XX ± .25 mm [0.010 IN]		SEE NOTES	3/4" CABLE TIE MOUNT, RUBBER ADHESIVE	
.X ± .5 mm [0.02 IN] .XXX ± .100 mm [0.004 IN]		COLOR	STOCK NO.	REV.
ANGULAR: ± 2°		SEE NOTES	10029-2	B



AVERY DENNISON


FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

AVERY DENNISON MARKETING SPECIFICATION

© 2020 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV	DATE	DESCRIPTION
B	5/31/24	REMOVED NON-EXISTANT FEATURE AND REMOVED UL LOGO

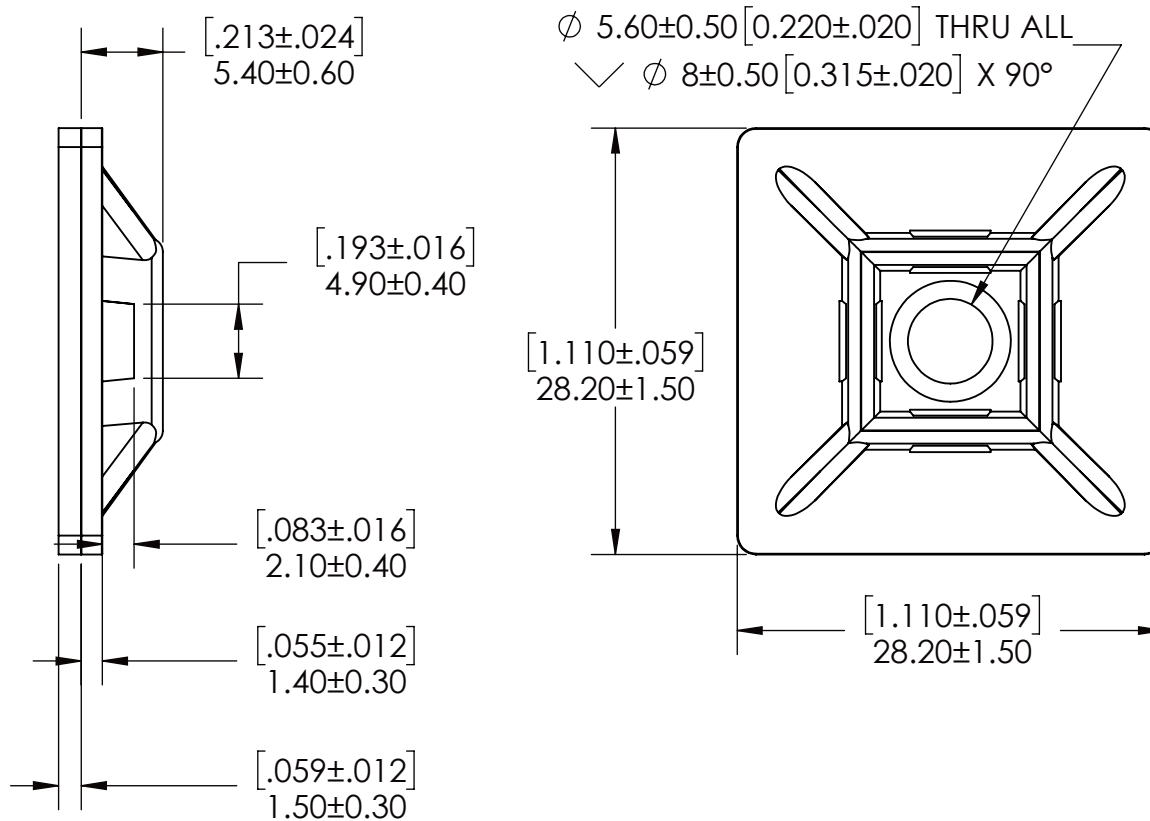

NOTES:

1. MATERIAL: POLYAMIDE 6.6 NATURAL+ RUBBER ADHESIVE TAPE
2. THESE MOUNTS HAVE A FLAMMABILITY RATING OF V-2
3. HUMIDITY ABSORPTION: 2,7% - 2,8% (23° C - 50% R.H.)
4. INSTALLATION TEMPERATURE: -10° C MINIMUM - +50° C MAXIMUM
5. OPERATION TEMPERATURE: -30° C - +85° C
6. LOOP TENSILE STRENGTH: 50 LBF (220N) MIN

WEIGHT, PP:		N/A	BAG QUANTITY:		100	APPLICATION TOOL	
WEIGHT, NYLON:		1.833 g (EST)	BOX QUANTITY:		1,000	ADHESIVE MOUNTING	
			CASE QUANTITY:		5,000		
<u>APPROVALS:</u>		ENG. APPR.		<i>J Richardson</i> 10.10.22		 EVERY DENNISON FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 978-353-8157	
		Q.A. APPR.		<i>William O' Malley</i> 07.17.23			
<u>SPECIFIED TOLERANCES ARE:</u>			MATERIAL			DESCRIPTION	
X. ± 1.0 mm [.04 IN] .XX ± .25 mm [.010 IN]			SEE NOTES			1" CABLE TIE MOUNT, RUBBER ADHESIVE	
.X ± .5 mm [0.02 IN] .XXX ± .100 mm [.004 IN]			COLOR			STOCK NO.	
ANGULAR: ± 2°			SEE NOTES			10030-2	
						REV. B	