



**AVERY
DENNISON**

Fastener
Solutions

Secur-A-Tach® Fasteners Marketing Specifications

For the following part numbers:

08300-1

06280C (Europe)

08300-BLK

08301-0

08302-0

08302-SPC

10416-0

RPP95SEC85-BLK

RPP95SEC135-BLK

RPP95SEC185-BLK

RPP95SEC235-BLK

17146-0

17147-0

17148-0

17149-0

17150-0

17151-0

17152-0

17153-0

RPP10SEC85-WHT

RPP10SEC135-WHT

RPP10SEC185-WHT

RPP10SEC235-WHT


January 3, 2025

AVERY DENNISON MARKETING SPECIFICATION

© 2019 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV.	DATE	DESCRIPTION
A	10.07.24	RELEASED

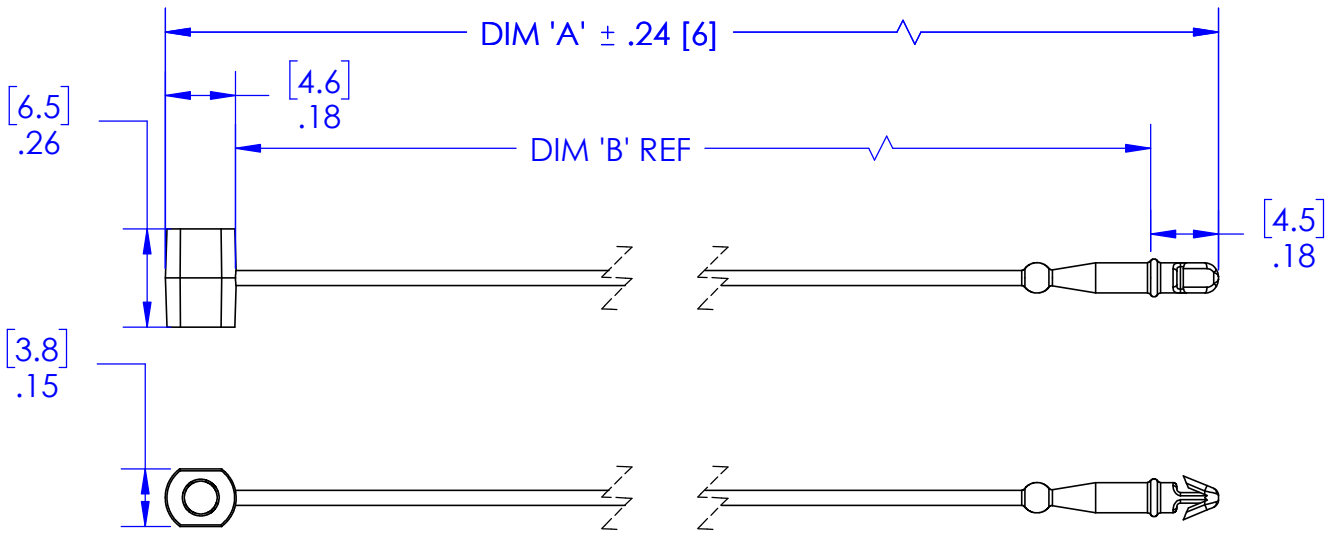

STOCK NUMBER	REV	COLOR	DIM 'A'	DIM 'B'	WEIGHT
RPP95SEC85-BLK	A	BLACK	3.3 [84]	2.9 [73]	0.1 GRAMS
RPP95SEC135-BLK	A	BLACK	5.3 [134]	4.9 [123]	0.1 GRAMS
RPP95SEC185-BLK	A	BLACK	7.3 [184]	6.9 [173]	0.1 GRAMS
RPP95SEC235-BLK	A	BLACK	9.2 [234]	8.8 [223]	0.1 GRAMS
RPP10SEC85-NAT	A	NATURAL	3.3 [84]	2.9 [73]	0.1 GRAMS
RPP10SEC135-NAT	A	NATURAL	5.3 [134]	4.9 [123]	0.1 GRAMS
RPP10SEC185-NAT	A	NATURAL	7.3 [184]	6.9 [173]	0.1 GRAMS
RPP10SEC235-NAT	A	NATURAL	9.2 [234]	8.8 [223]	0.1 GRAMS

MINIMUM TENSILE STRENGTH	8 LBF [3.6 kg] MIN
MATERIAL	NATURAL - 100% rPP BLACK - 95% rPP MIN; COLOR CONCENTRATE
WEIGHT	SEE TABLE
PACKAGED IN	500 PER BAG 5000 PER INNER CARTON 50000 PER MASTER CARTON

APPROVALS:	ENG. APPR. <i>Dave Schuttler</i> 10.07.24
	Q.A. APPR. <i>William O' Malley</i> 10.07.24



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157


SPECIFIED TOLERANCES ARE:		MATERIAL	DESCRIPTION	ECOTACH rPP SECURATACH
.XX ± .03 INCHES	.X ± .7 mm	SEE TABLE	STOCK NO.	
.XXX ± .010 INCHES	.XX ± .25 mm	COLOR	SEE TABLE	REV.
ANGULAR: ± 2°		SEE TABLE		A

AVERY DENNISON MARKETING SPECIFICATION

© 2019 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV.	DATE	DESCRIPTION
A	11.02.22	RELEASED

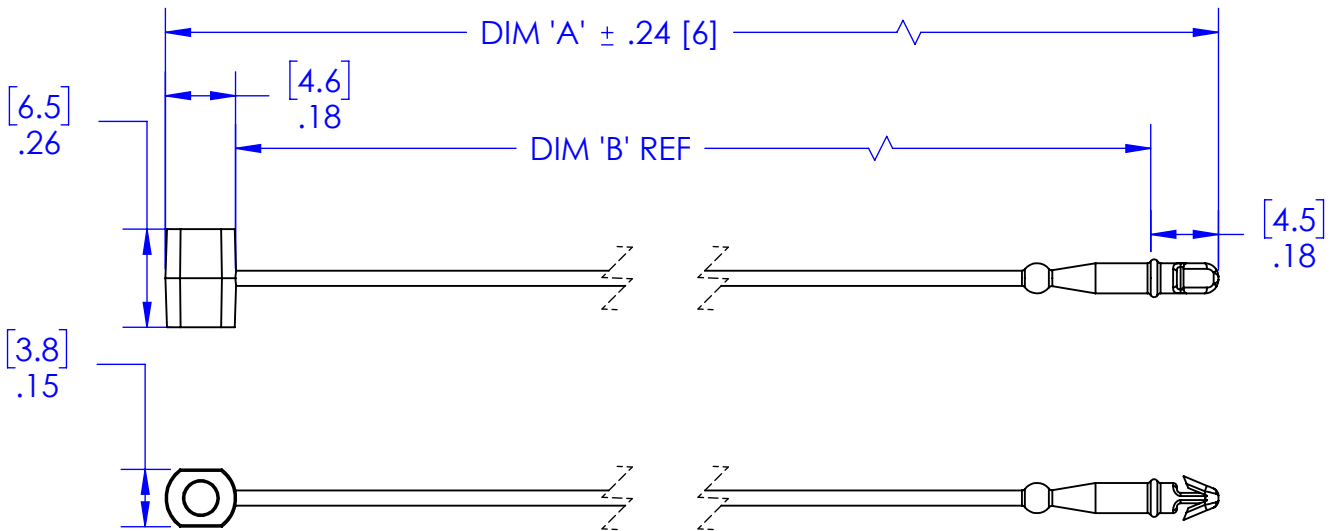

STOCK NUMBER	REV	COLOR	DIM 'A'	DIM 'B'	WEIGHT
17146-0	A	BLACK	3.3 [84]	2.9 [73]	0.1 GRAMS
17147-0	A	BLACK	5.3 [134]	4.9 [123]	0.1 GRAMS
17148-0	A	BLACK	7.3 [184]	6.9 [173]	0.1 GRAMS
17149-0	A	BLACK	9.2 [234]	8.8 [223]	0.1 GRAMS
17150-0	A	NATURAL	3.3 [84]	2.9 [73]	0.1 GRAMS
17151-0	A	NATURAL	5.3 [134]	4.9 [123]	0.1 GRAMS
17152-0	A	NATURAL	7.3 [184]	6.9 [173]	0.1 GRAMS
17153-0	A	NATURAL	9.2 [234]	8.8 [223]	0.1 GRAMS

MINIMUM TENSILE STRENGTH	8 LBF [3.6 kg] MIN
MATERIAL	NATURAL - 30% rPP; 70% PP BLACK - 30% rPP; 70% PP; 2% COLOR CONCENTRATE
WEIGHT	SEE TABLE
PACKAGED IN	500 PER BAG 5000 PER INNER CARTON 50000 PER MASTER CARTON

APPROVALS:	ENG. APPR. <i>Dave Schuttler</i> 11.02.22
	Q.A. APPR. <i>Rick Estano</i> 11.02.22




FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

SPECIFIED TOLERANCES ARE:		MATERIAL	DESCRIPTION	ECOTACH rPP SECURATACH
.XX ± .03 INCHES	.X ± .7 mm	SEE TABLE	STOCK NO.	
.XXX ± .010 INCHES	.XX ± .25 mm	COLOR	SEE TABLE	REV.
ANGULAR: ± 2°		SEE TABLE		A

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

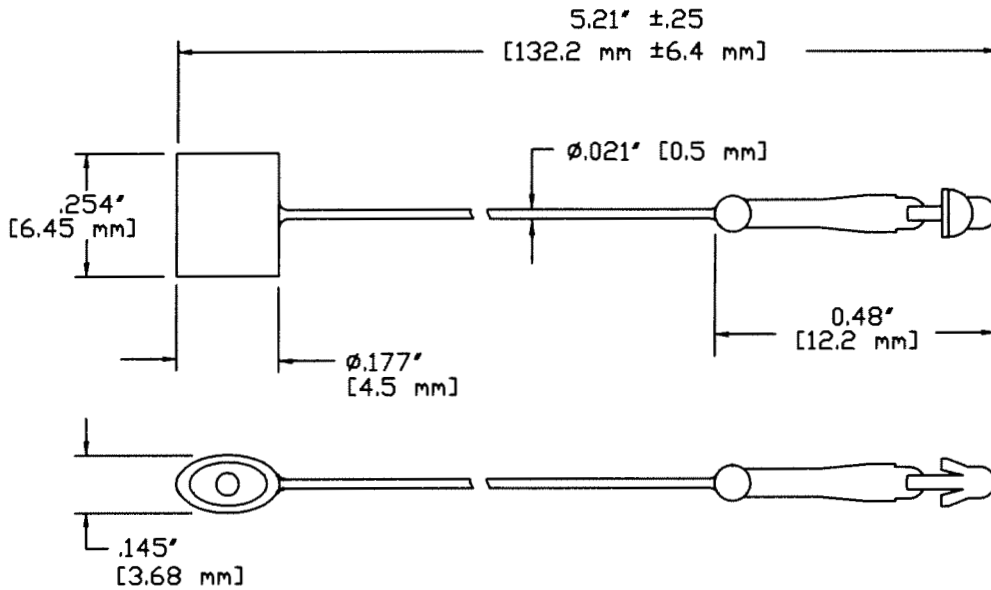

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	10 lbf. MIN. (4.5 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	1.55" / 39.3mm
PACKAGED:	500/BAG, 5000/CTN, 50,000/CASE



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX: 1-800-848-2169

DESCRIPTION:

5" (135mm) SECUR-A-TACH™

APPROVAL:

James C. Bassett 6-30-2010

STOCK NO.


08300-1

REV

B

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

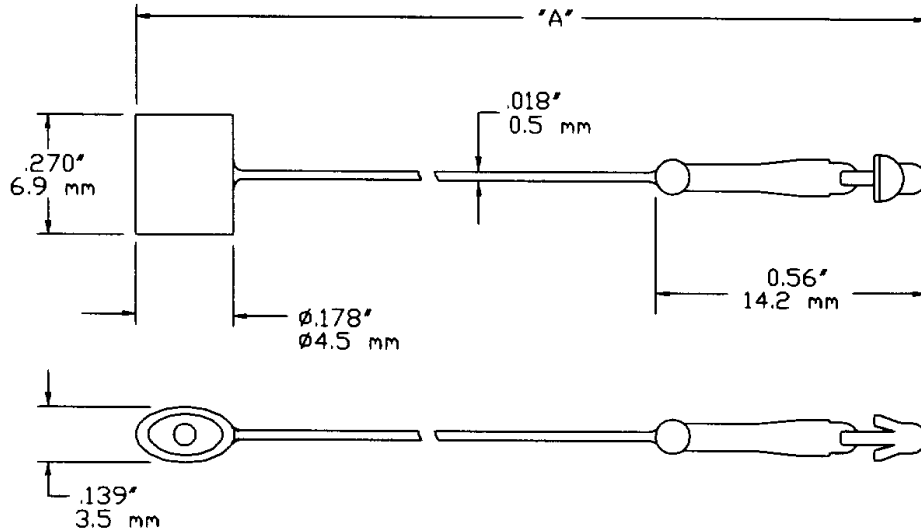

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	7.5 lbf. MIN. (3.4 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	SEE TABLE
PACKAGED:	5000/CTN, 50,000/CASE

STK.NO	DIM. "A"	DIM. "A" TOL.	WEIGHT	BUNDLE DIA.	COLOR
08300	5.2" / 132.1mm	±.25" / ±6.4mm	.091/2.3mm grams/ea.	1.49" / 37.8mm	NATURAL
08301	9.5" / 241.3mm	±.25" / ±6.4mm	.110/2.8mm grams/ea.	2.86" / 72.6mm	NATURAL
08302	3.4" / 86.4mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.92" / 23.4mm	NATURAL
11124	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	NATURAL
11125	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL: 1-800-225-5913
FAX: 1-800-848-2169

DESCRIPTION:

SECUR-A-TACH™

APPROVAL:

F. M. [Signature] 12-9-04

STOCK NO.


SEE ABOVE

REV

J

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

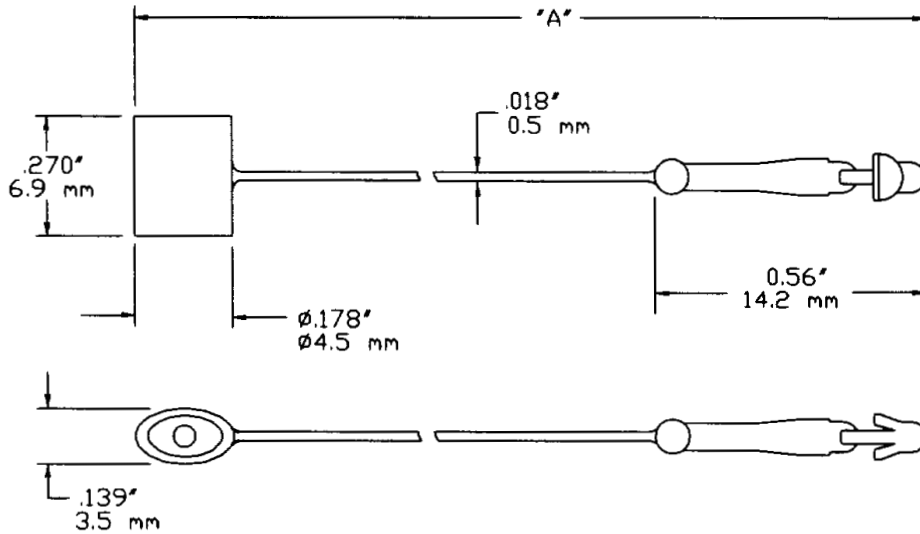

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	7.5 lbf. MIN. (3.4 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	SEE TABLE
PACKAGED:	5000/CTN, 50,000/CASE

STK.NO	DIM. "A"	DIM. "A" TOL.	WEIGHT	BUNDLE DIA.	COLOR
08300	5.2" / 132.1mm	±.25" / ±6.4mm	.091/2.3mm grams/ea.	1.49" / 37.8mm	NATURAL
08301	9.5" / 241.3mm	±.25" / ±6.4mm	.110/2.8mm grams/ea.	2.86" / 72.6mm	NATURAL
08302	3.4" / 86.4mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.92" / 23.4mm	NATURAL
11124	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	NATURAL
11125	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
FAX: 1-800-848-2169

DESCRIPTION:

SECUR-A-TACH™

APPROVAL:

F. M. [Signature] 12-9-04

STOCK NO.


SEE ABOVE

REV

J

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

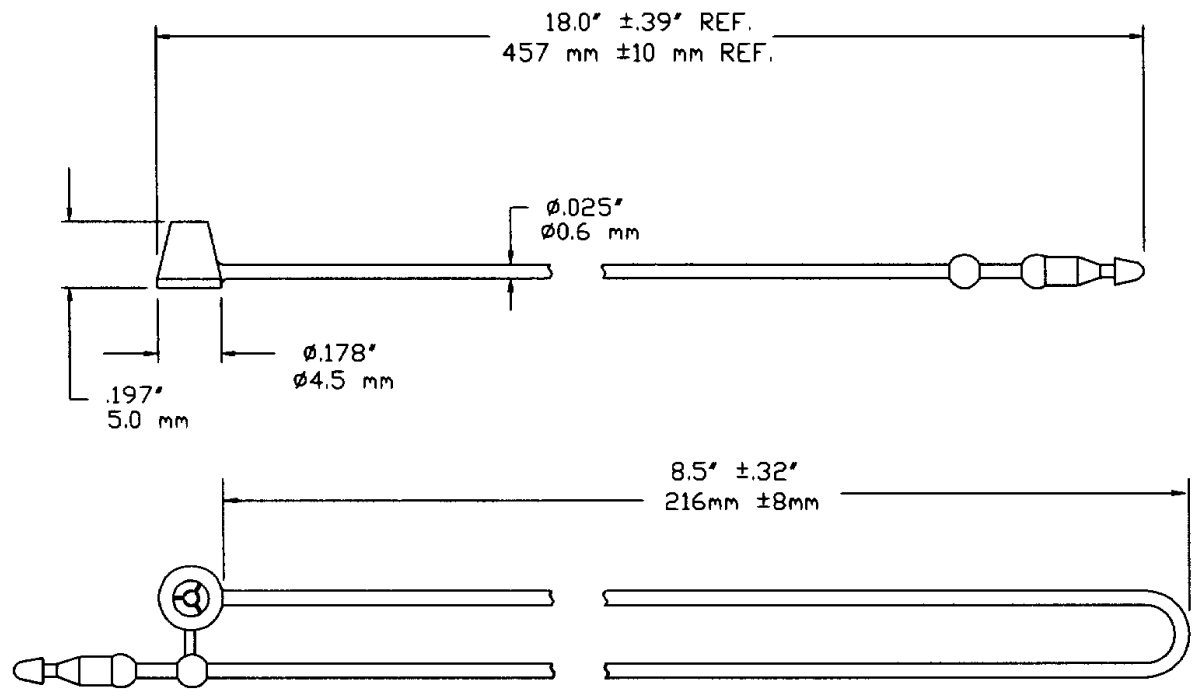

NOT TO SCALE

TENSILE STRENGTH RANGE:	7.5 LBSF. MINIMUM (3.4 KGF)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	5.4 INCHES (137 mm)
PACKAGED:	500/BAG, 5000/CARTON, 50,000/CASE
WEIGHT:	0.180 grams/each



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

18" SECURATACH™

APPROVAL:

Frank M. [Signature] 11-2-04

STOCK NO.


10416 NAT

REV

E

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

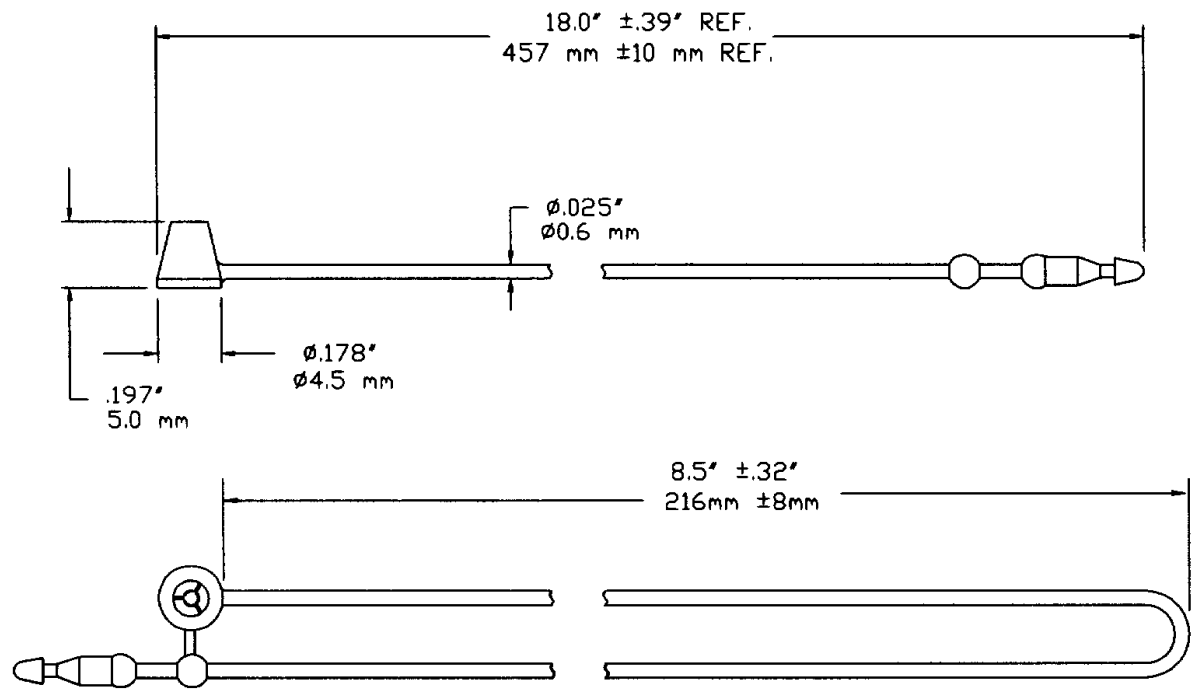

NOT TO SCALE

TENSILE STRENGTH RANGE:	7.5 LBSF. MINIMUM (3.4 KGF)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	5.4 INCHES (137 mm)
PACKAGED:	500/BAG, 5000/CARTON, 50,000/CASE
WEIGHT:	0.180 grams/each



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

18" SECURATACH™

APPROVAL:

Frank M. [Signature] 11-2-04

STOCK NO.

10416 NAT

REV

E