



Fastener
Solutions

Secur-A-Tach® Fasteners Marketing Specifications

For the following part numbers:

08300-1

08300-BLK

08301-0

08302-0

08302-SPC


10416-0

06280C (Europe)

May 29, 2019

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

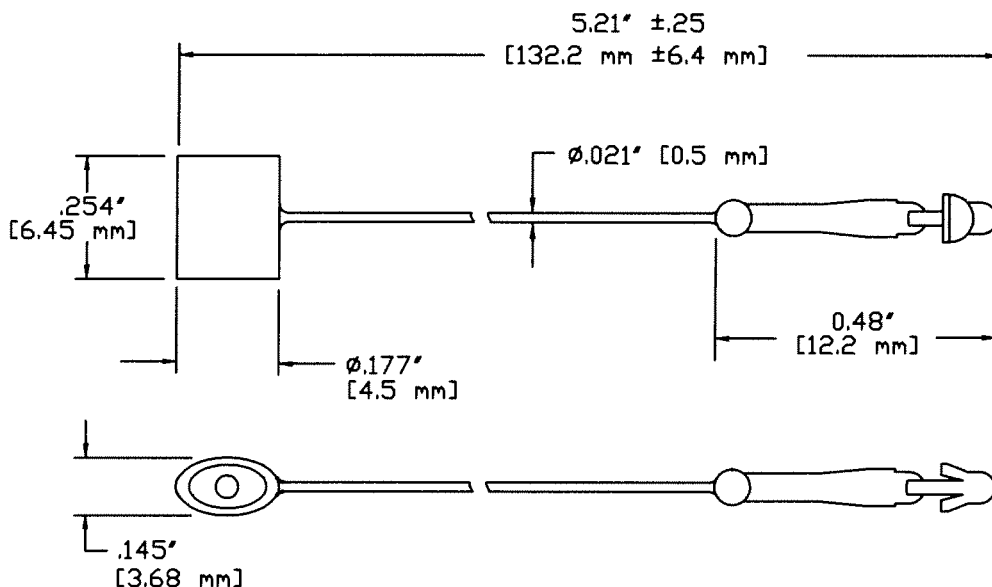

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	10 lbf. MIN. (4.5 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	1.55" / 39.3mm
PACKAGED:	500/BAG, 5000/CTN, 50,000/CASE



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL: 1-800-225-5913
FAX: 1-800-848-2169

DESCRIPTION:

5" (135mm) SECUR-A-TACH™

APPROVAL:

James C. Bennett 6-30-2010


STOCK NO.

08300-1

REV
B

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

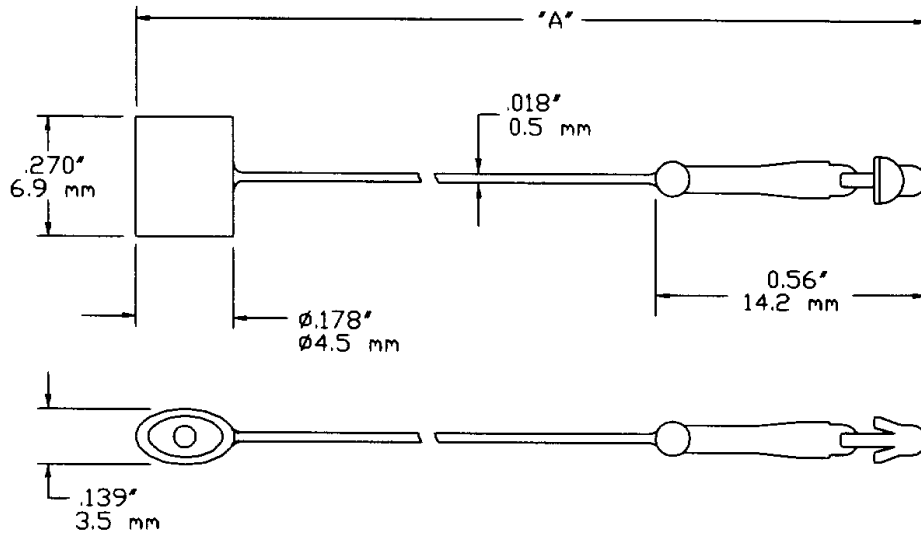

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	7.5 lbf. MIN. (3.4 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	SEE TABLE
PACKAGED:	5000/CTN, 50,000/CASE

STK.NO	DIM. "A"	DIM. "A" TOL.	WEIGHT	BUNDLE DIA.	COLOR
08300	5.2" / 132.1mm	±.25" / ±6.4mm	.091/2.3mm grams/ea.	1.49" / 37.8mm	NATURAL
08301	9.5" / 241.3mm	±.25" / ±6.4mm	.110/2.8mm grams/ea.	2.86" / 72.6mm	NATURAL
08302	3.4" / 86.4mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.92" / 23.4mm	NATURAL
11124	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	NATURAL
11125	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	BLACK

AVERY DENNISON
FASTENER DIVISION
 FITCHBURG, MA 01420 U.S.A.
 TEL: 1-800-225-5913
 FAX: 1-800-848-2169

DESCRIPTION:

SECUR-A-TACH™

APPROVAL:

F. M. [Signature] 12-9-04

STOCK NO.


SEE ABOVE

REV

J

AVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. = ± .030 IN.
MM = ± 0.7 mm

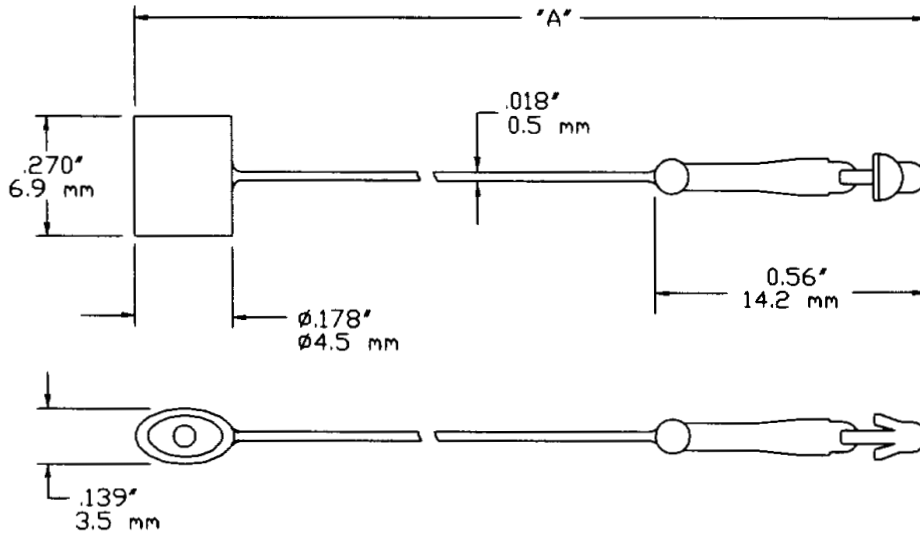

NOT TO SCALE

MINIMUM APPLIED TENSILE STRENGTH:	7.5 lbf. MIN. (3.4 kgf.)
MATERIAL:	POLYPROPYLENE
COLOR:	SEE TABLE
PACKAGED:	5000/CTN, 50,000/CASE

STK.NO	DIM. "A"	DIM. "A" TOL.	WEIGHT	BUNDLE DIA.	COLOR
08300	5.2" / 132.1mm	±.25" / ±6.4mm	.091/2.3mm grams/ea.	1.49" / 37.8mm	NATURAL
08301	9.5" / 241.3mm	±.25" / ±6.4mm	.110/2.8mm grams/ea.	2.86" / 72.6mm	NATURAL
08302	3.4" / 86.4mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.92" / 23.4mm	NATURAL
11124	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	NATURAL
11125	2.5" / 63mm	±.25" / ±6.4mm	.088/2.2mm grams/ea.	.80" / 20mm	BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL 1-800-225-5913
FAX: 1-800-848-2169

DESCRIPTION:

SECUR-A-TACH™

APPROVAL:

F. M. [Signature] 12-9-04

STOCK NO.


SEE ABOVE

REV

J

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

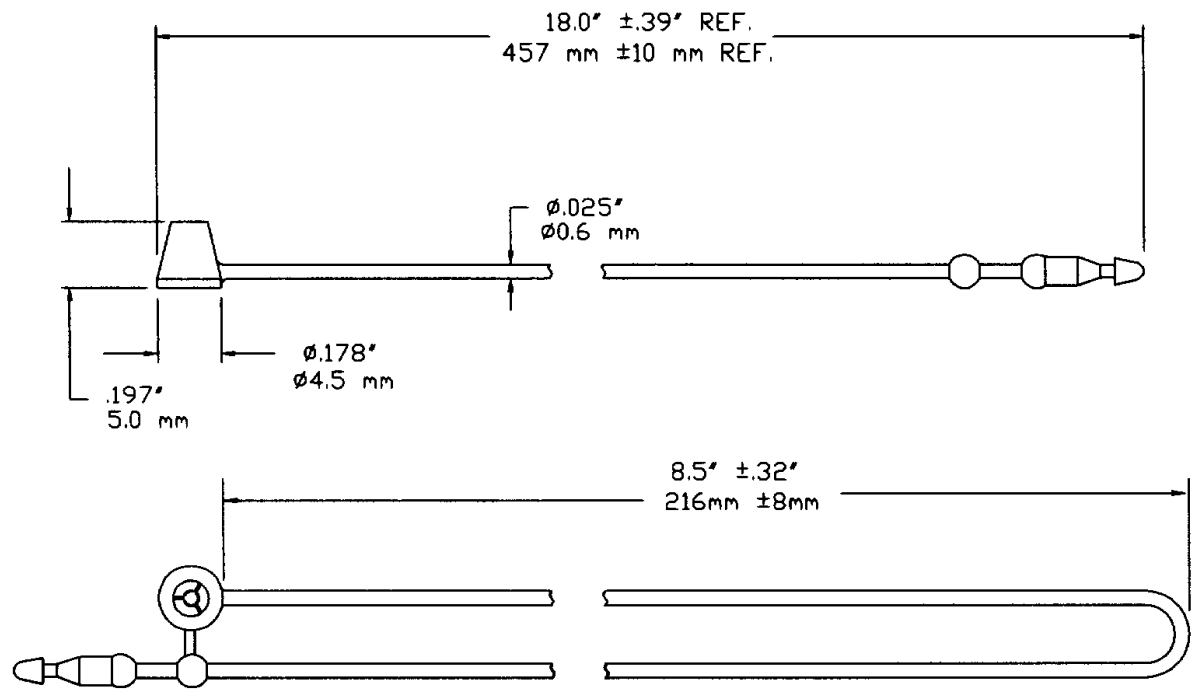

NOT TO SCALE

TENSILE STRENGTH RANGE:	7.5 LBSF. MINIMUM (3.4 KGF)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	5.4 INCHES (137 mm)
PACKAGED:	500/BAG, 5000/CARTON, 50,000/CASE
WEIGHT:	0.180 grams/each



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

18" SECURATACH™

APPROVAL:

Frank M. [Signature] 11-2-04

STOCK NO.


10416 NAT

REV

E

EVERY DENNISON MARKETING SPECIFICATION

TOLERANCES IN. =± .030 IN.
MM =± 0.7 mm

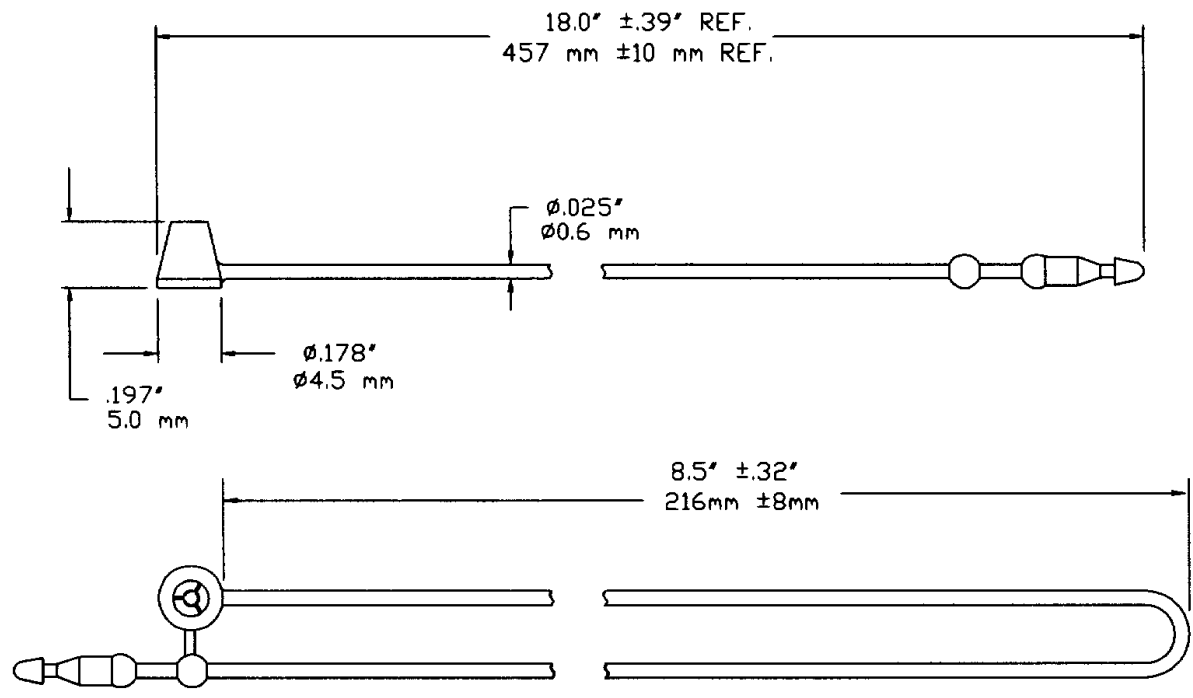

NOT TO SCALE

TENSILE STRENGTH RANGE:	7.5 LBSF. MINIMUM (3.4 KGF)
MATERIAL:	POLYPROPYLENE
COLOR:	NATURAL
BUNDLE DIAMETER:	5.4 INCHES (137 mm)
PACKAGED:	500/BAG, 5000/CARTON, 50,000/CASE
WEIGHT:	0.180 grams/each



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
MA. 978-353-8157

DESCRIPTION:

18" SECURATACH™

APPROVAL:

Frank M. [Signature] 11-2-04

STOCK NO.

10416 NAT

REV

E