

Super Heavy Duty Fasteners Marketing Specifications

For the following part numbers:

10575-0


10576-0


10577-0

10578-0

10579-0

TOLERANCES IN. =± .030 IN. MM =± 0.7 mm





NOT TO SCALE

NUMBER OF STREET	10/11 L DOC / 4 E /E 0 L/CE
NOMINAL TENSILE STRENGTH	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER	.00190 oz. / .056 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL
	(CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



DESCRIPTION:

FASTENER DIMISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 1-800-848-2169

3/4" (19mm) Swiftach ®SHD T—End

APPROVAL:


Edwil 1-30-09


10575

STOCK NO.

REV

TOLERANCES IN. = \pm .030 IN. MM = \pm 0.7 mm





NOT TO SCALE

NOMINAL TENSILE STRENGTH	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT/FASTENER:	.00218 oz. / .064 grams
CLIP QUANTITY:	50
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL
	(CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5,000/CTN., 50,000/CASE
T/F CONN. PADDLES	YES



FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 1-800-848-2169

DESCRIPTION:

1-1/4" (32mm) Swiftach ® SHD T-End

APPROVAL:


Lela 1-30-09


STOCK NO.

10576

REV H

TOLERANCES IN. = \pm .030 IN. MM = \pm 0.7 mm

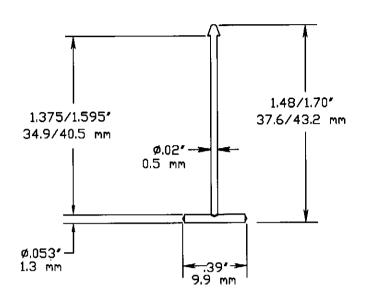



NOT TO SCALE


NOMINAL TENSILE STRENGTH:	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT	.081 GRAMS PER FASTENER
CLIP QUANTITY:	25
APPLICATION TOOL	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL
	(CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN. PADDLES:	N□




FASTENER DMISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 1-800-848-2169

DESCRIPTION: 1-1/2" (38mm) SHD Loop	APPROVAL:	APPROVAL:	
(00,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	STOCK NO.	REV	
	10577	Н Н	

TOLERANCES IN. = \pm .030 IN. MM = \pm 0.7 mm

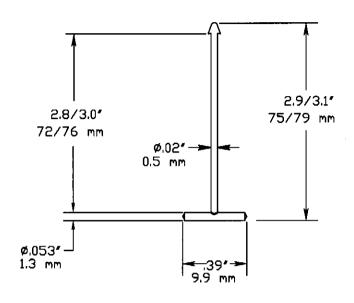



NOT TO SCALE

NOMINAL TENSILE STRENGTH:	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT:	.124 GRAMS PER FASTENER
CLIP QUANTITY:	25
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL (CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN:	5000/CTN, 50,000/CASE
T/F CONN. PADDLES:	ND




FASTENER DIMISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 1-800-848-2169


DESCRIPTION:

3" (74mm) SHD Loop

STOCK NO. REV
10578 G

T□LERANCES IN. =± .030 IN. MM =± 0.7 mm

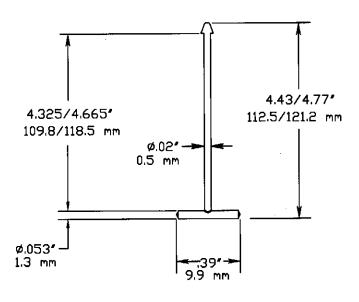



NOT TO SCALE

NOMINAL TENSILE STRENGTH:	10/11 LBSF. / 4.5/5.0 KGF.
MATERIAL:	NYLON: TYPE 6 - NATURAL
WEIGHT:	.124 GRAMS PER FASTENER
CLIP QUANTITY:	25
APPLICATION TOOL:	10637 STANDARD PISTOL-GRIP MARK II HAND TOOL
	(CONTACT LOCAL SALES PERSON FOR INFORMATION ON POWERED EQUIPMENT)
PACKAGED IN	5000/CTN, 50,000/CASE
T/F CONN. PADDLES:	No



DESCRIPTION:

FASTENER DIVISION FITCHBURG, MA 01420 U.S.A. TEL. 1-800-225-5913 FAX. 1-800-848-2169

4-1/2" (114mm) SHD Loop

APPROVAL:

Eelyk 1-30-09

STOCK NO.

REV

10579

G