


AVERY DENNISON MARKETING SPECIFICATION

© 2026 AVERY DENNISON CORPORATION. ALL RIGHTS RESERVED

HISTORY

REV.	DATE	DESCRIPTION
G	05.01.13	UPDATED TO NEW FORMAT; RENUMBERED DUE TO REMOVAL OF BALLOON 5; CHG 6.20IN DIM TO 6.15IN
H	04.03.14	ADDED NOTE TO ITEM 8 AND UPDATED ITEM 5 AND 9
J	7/17/26	ADDED BALLONS ON FLAMMABILITY AND TENSILE

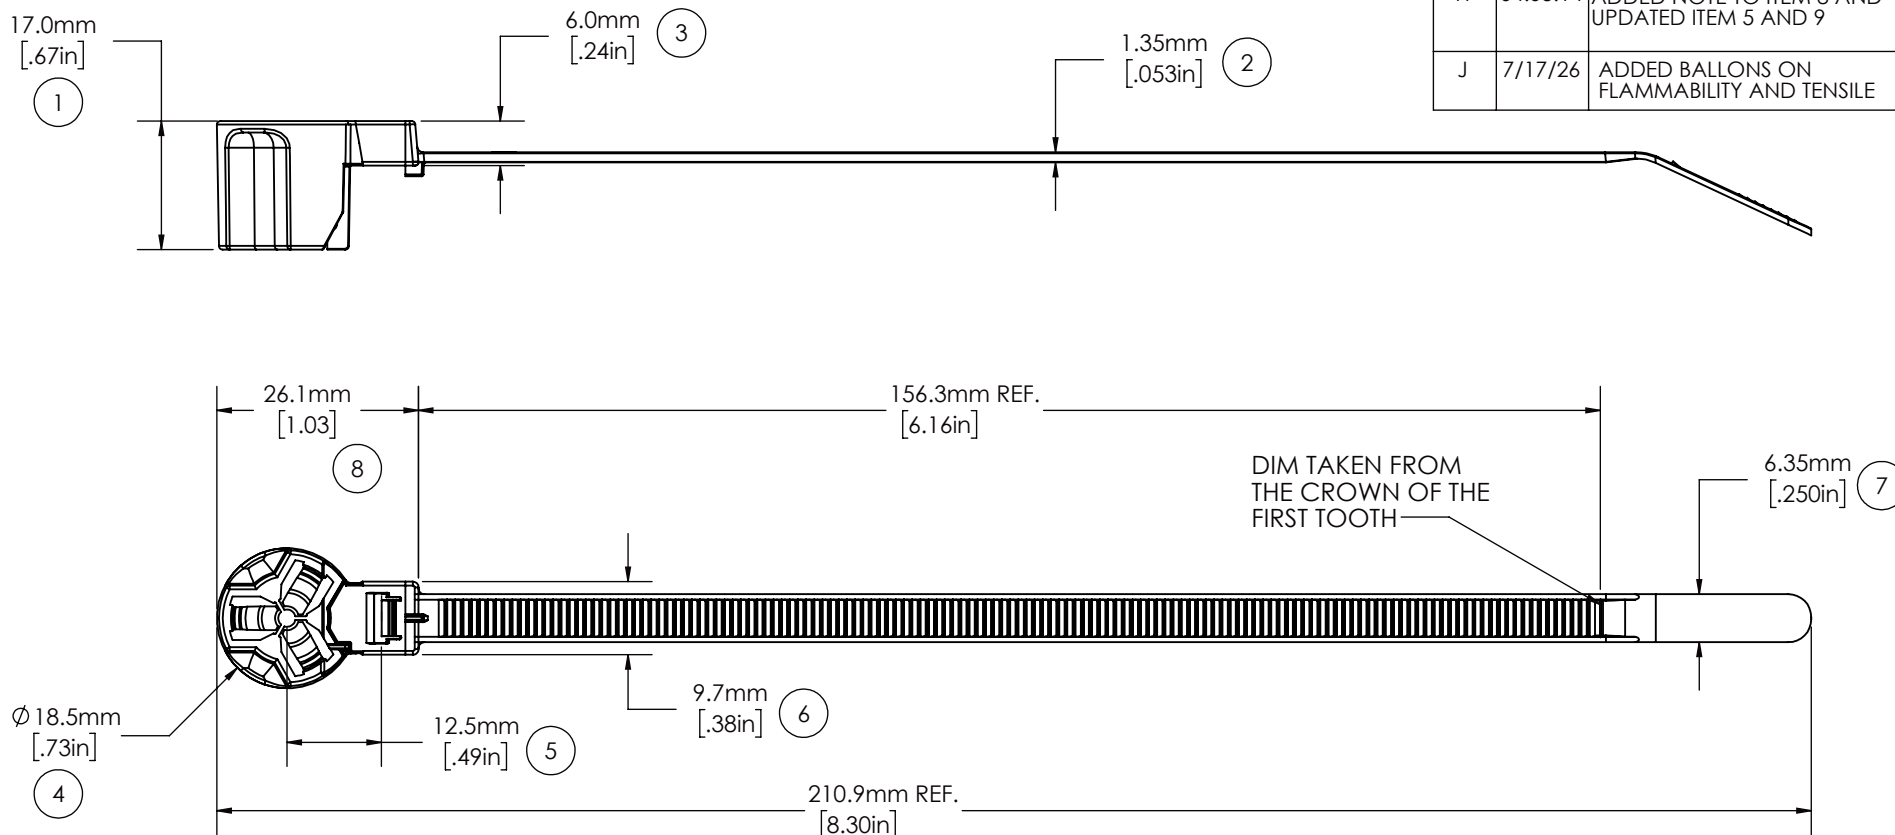

9	△ FLAMMABILITY RATING:	TESTED & APPROVED PER FMVSS302
	MOUNTING:	M8 STUD
10	△ TENSILE STRENGTH:	50 LBF / 22.7 KGF MIN.
	OPERATING TEMP RANGE:	-40°F (-40°C) TO 221°F (105°C)
	WEIGHT:	3.37 GRAMS
	BUNDLE DIAMETER:	Ø 1.6MM TO Ø 44.5MM
	TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP. AVERY DENNISON PART NO. 12001-0
	TOOL TENSION SETTING:	6 - 8
	PACKAGING:	500/BAG, 10 BAGS/MASTER

NOTES:

1. THE (△) INDICATES SPECIAL CHARACTERISTIC.

APPROVALS:

ENG. APPR.	Parth Patel	7/17/26
Q.A. APPR.	Abraham Rocha	7/17/26

SPECIFIED TOLERANCES ARE:

.XX ± .03 INCHES	.X ± .7 MM
.XXX ± .01 INCHES	.XX ± .25 MM
ANGULAR: ± 2°	

MATERIAL	NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED
COLOR	BLACK



FASTENER DIVISION
FITCHBURG, MA 01420 U.S.A.
TEL. 1-800-225-5913
FAX. 978-353-8157

DESCRIPTION	M8 WELD STUD TIE
STOCK NO.	20011-0
REV.	J